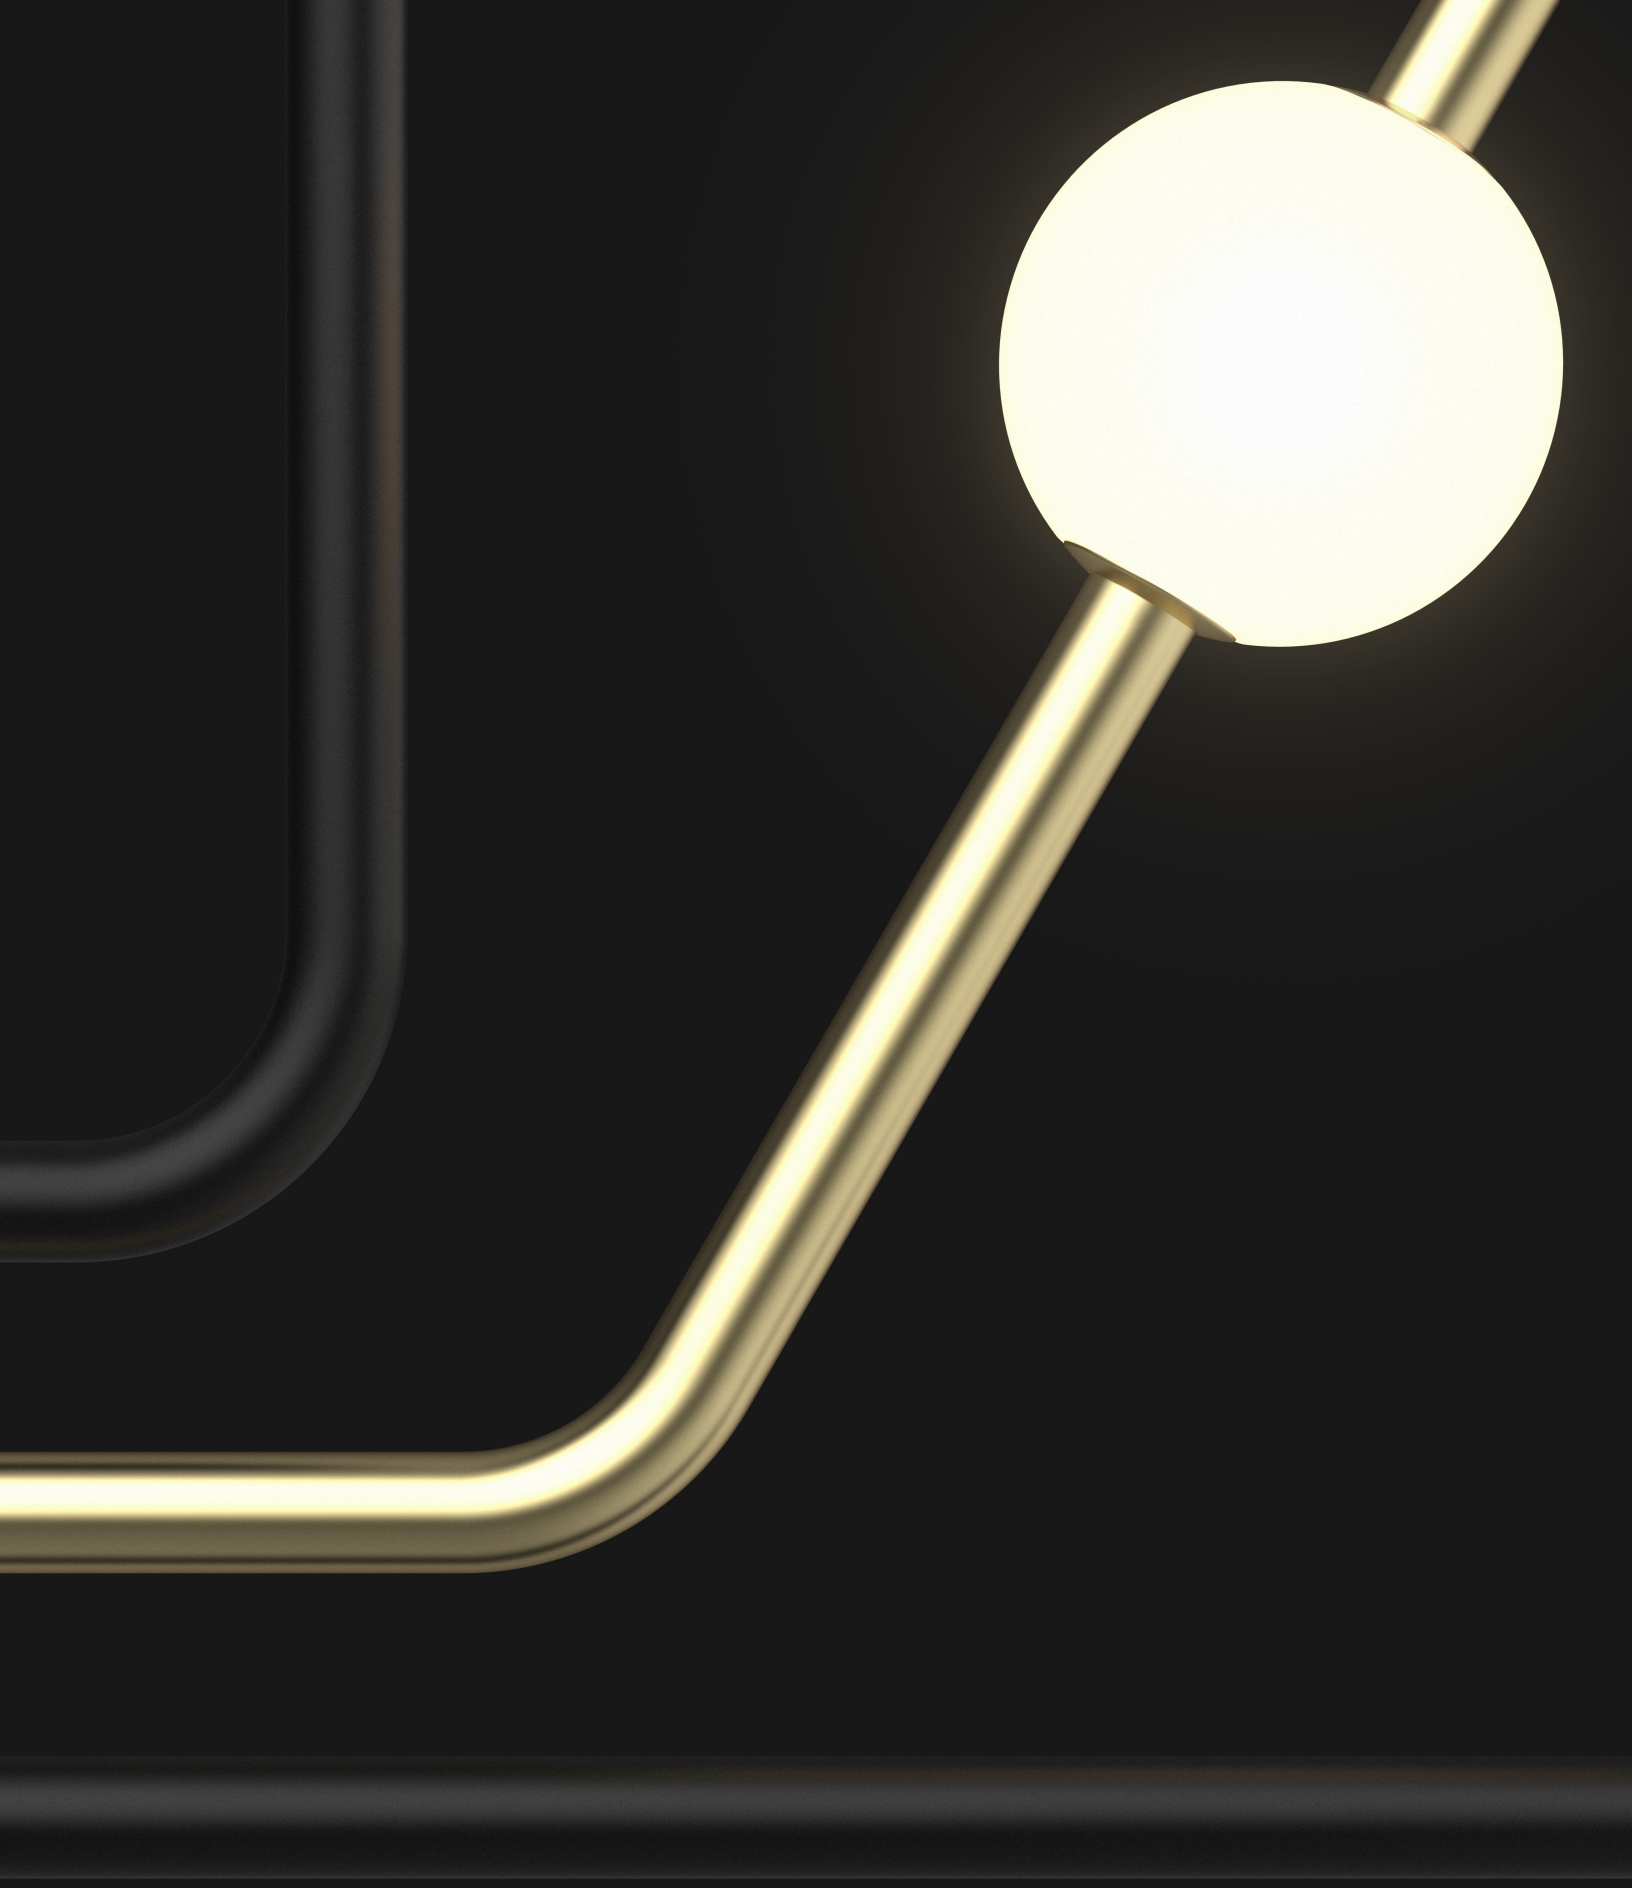

EUREKA

Berri 74600

H12-120, A06 - WHE, BLKE

EUREKA

PUNCTUATE SPACE.

The familiar meets the fresh and new in Berri. Classic ball and seamless tube components come configured in various geometries and sizes. Luminaires can be arranged to create distinctive lighting designs. Berri brings life and enhances any space, from small to large, from classic to contemporary.

BERRI ANGULAR

BERRI HEXAGONAL

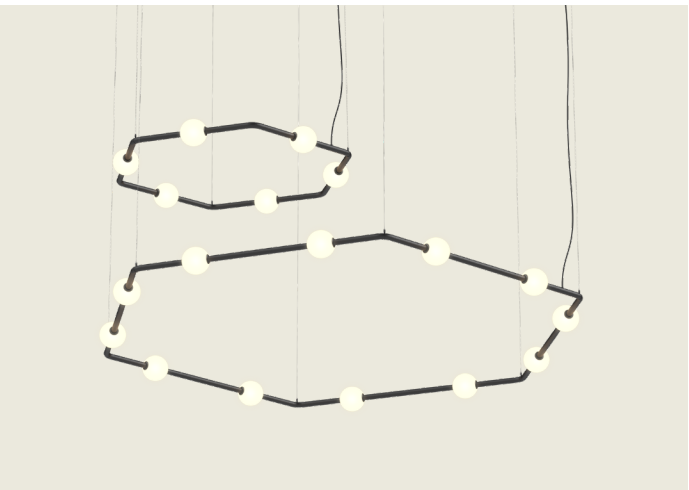

BERRI HORIZONTAL

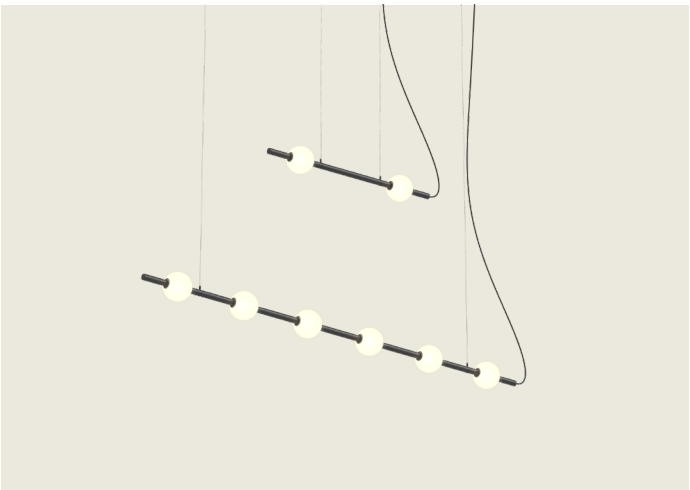

BERRI SQUARE & RECTANGULAR

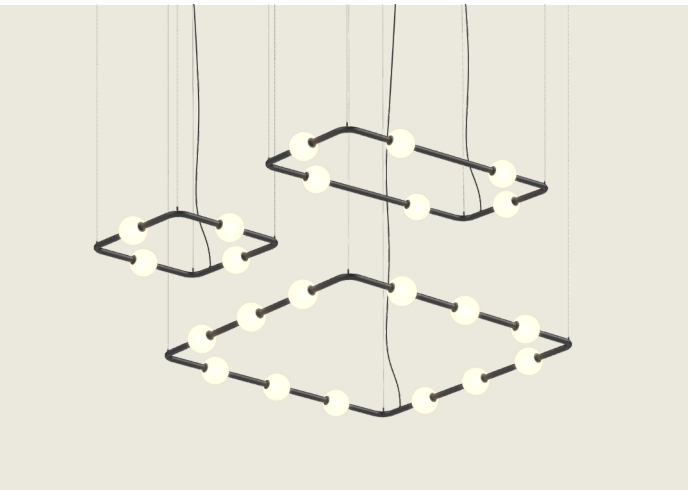

BERRI VERTICAL

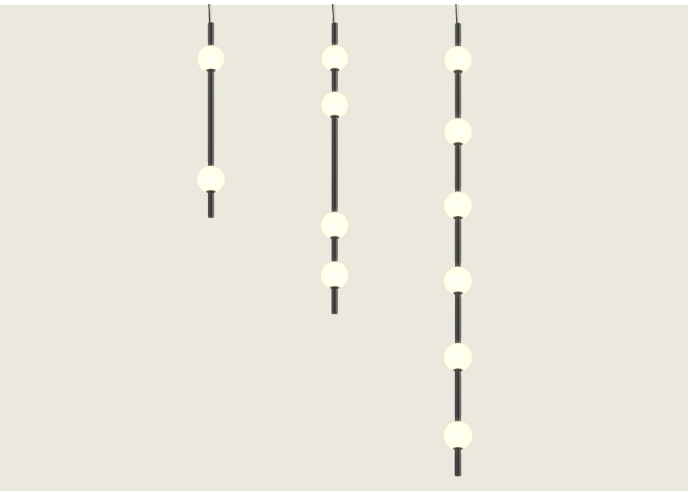

BERRI 3D

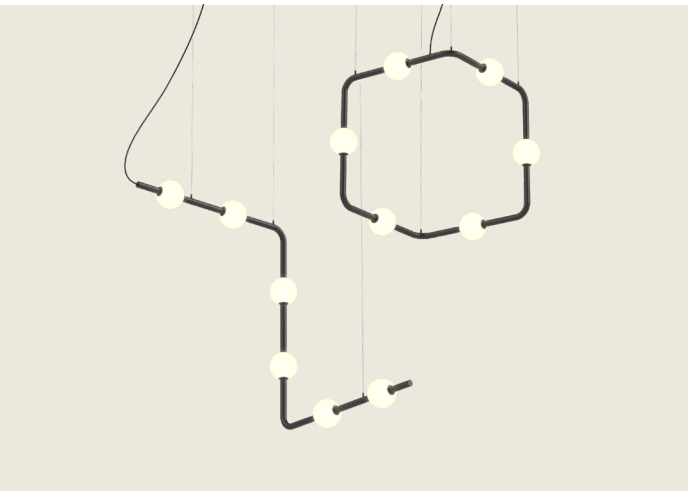

EUREKA

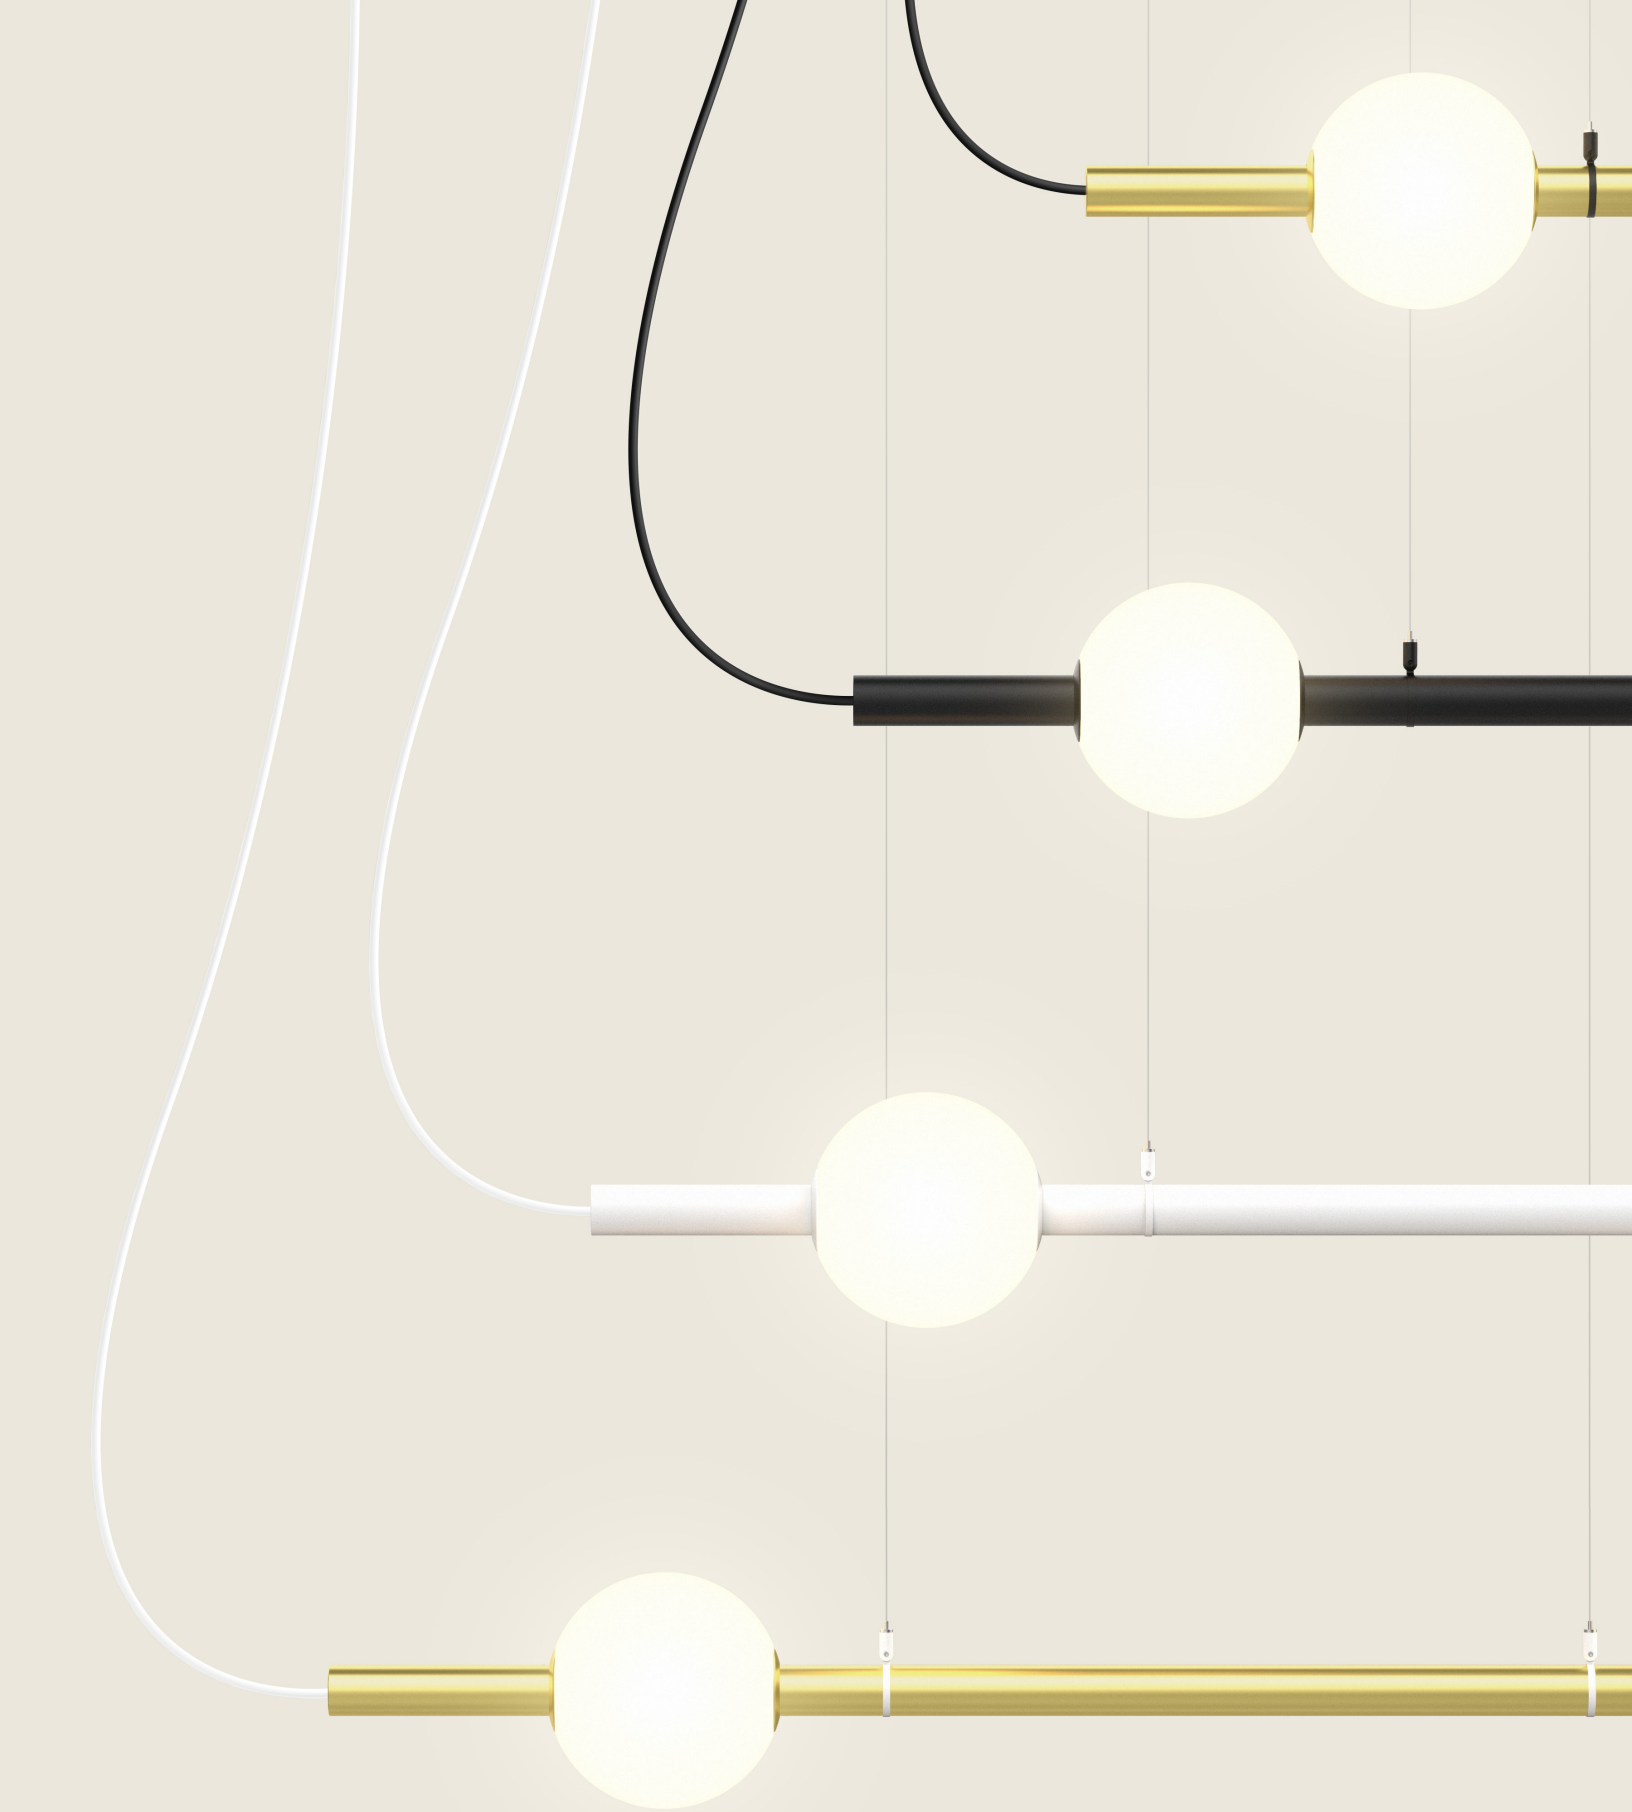

Berri is offered in three standard finishes: black, white and soft gold. The black and white are rich, fine textured finishes. The soft gold finish elegantly gives warmth to the luminaire and enables designers to create a room's statement piece.

Berri can also be painted any RAL color. Contact factory for more details.

EUREKA

PLAY THE ANGLES

Berri has ten funky angular configurations that can be hung vertically, flat or at any angle up to 60 degrees, affording the kind of freedom designers crave.

With glowing spheres and beautifully finished rods, Berri is perfect for sophisticated hospitality settings where rich, diffused light sets the mood.

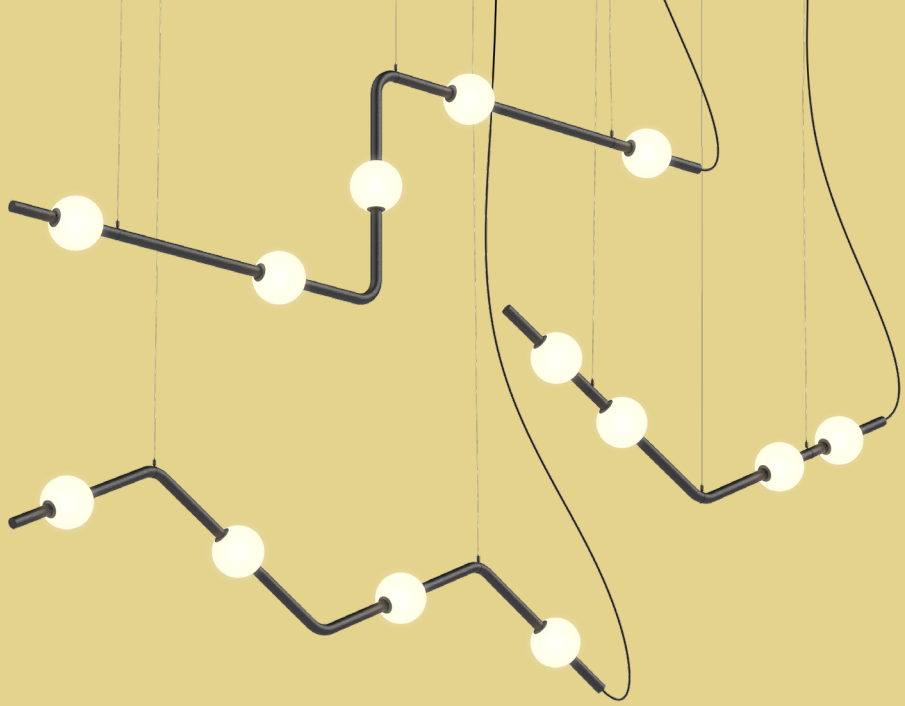

W04



W08



A04



A06



A08



S04



S05



Z03



Z05



Z06



EUREKA

W04 - SGO

EUREKA

BERRI 74600-ANGULAR

PROJECT PROJET

SPEC TYPE

NOTES

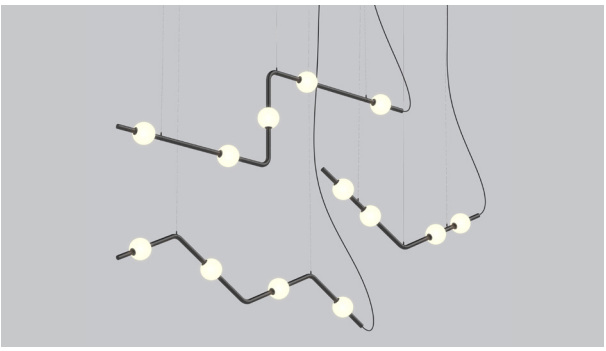

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE

ANGULAR



3D



HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

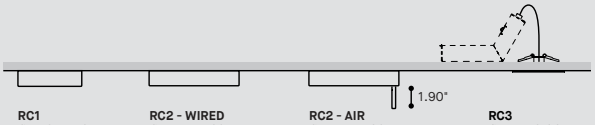

RC1	RC2 - WIRED	RC2 - AIR	RC3
Ø5.50" x 1.35"	Ø7.75" x 1.30"	Ø7.75" x 1.30"	Ø4.5" x 0.06"
Ø140 x 34.3mm	Ø196.9 x 33mm	Ø196.9 x 33mm	Ø114.3 x 1.5mm

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE



RC ROC

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE

74600-A04	BERRI ANGULAR V SHAPE 4 HEADS
74600-A06	BERRI ANGULAR V SHAPE 6 HEADS
74600-A08	BERRI ANGULAR V SHAPE 8 HEADS
74600-S04	BERRI ANGULAR S SHAPE 4 HEADS
74600-S05	BERRI ANGULAR S SHAPE 5 HEADS
74600-W04	BERRI ANGULAR W SHAPE 4 HEADS
74600-W06	BERRI ANGULAR W SHAPE 6 HEADS
74600-Z03	BERRI ANGULAR Z SHAPE 3 HEADS
74600-Z05	BERRI ANGULAR Z SHAPE 5 HEADS
74600-Z06	BERRI ANGULAR Z SHAPE 6 HEADS

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE GRADATION

DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION
* REQUIRES RC1 CANOPY

CABLE CÂBLE — **AC**

AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING OPTION OPTION DE MONTAGE

	ROUND CANOPY / PAVILLON ROND
RC1	SCREWLESS 1.35" CANOPY (2473F)
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)

* ONLY AVAILABLE WITH ROC CANOPY POSITION
* NON IC RATED FOR HO

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RC	CANOPY WITH AIRCRAFT CABLE
ROC	CANOPY OFFSET TO AIRCRAFT CABLE

CANOPY FINISH FINI PAVILLON

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE

POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES

WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER

TUBE FINISH FINI TUBE

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
SGO	SOFT GOLD
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR — **WH**

WH	WHITE

ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

EUREKA

BERRI 74600-ANGULAR TUNABLE WHITE

PROJECT PROJET

SPEC TYPE

NOTES

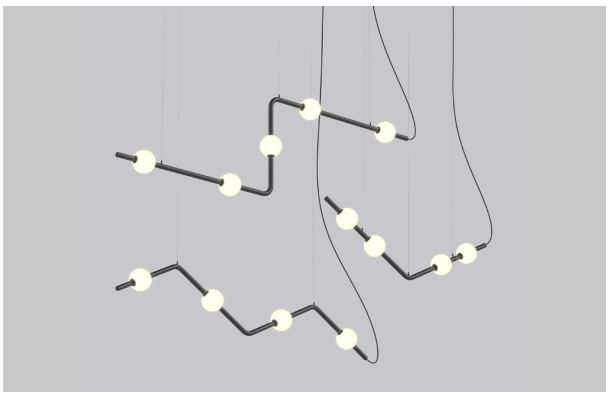

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE

ANGULAR



3D



HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

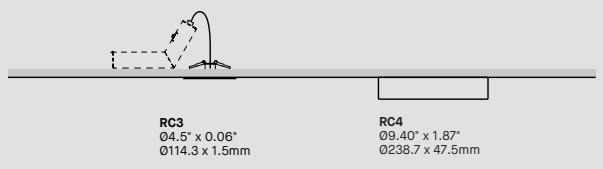

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

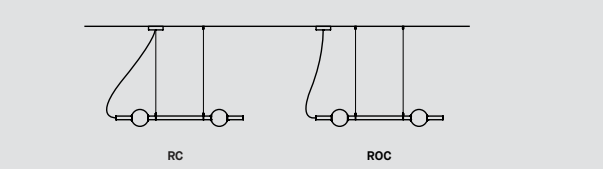

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

		CODE
MODEL MODÈLE		
74600-A04	BERRI ANGULAR V SHAPE 4 HEADS	
74600-A06	BERRI ANGULAR V SHAPE 6 HEADS	
74600-A08	BERRI ANGULAR V SHAPE 8 HEADS	
74600-S04	BERRI ANGULAR S SHAPE 4 HEADS	
74600-S05	BERRI ANGULAR S SHAPE 5 HEADS	
74600-W04	BERRI ANGULAR W SHAPE 4 HEADS	
74600-W06	BERRI ANGULAR W SHAPE 6 HEADS	
74600-Z03	BERRI ANGULAR Z SHAPE 3 HEADS	
74600-Z05	BERRI ANGULAR Z SHAPE 5 HEADS	
74600-Z06	BERRI ANGULAR Z SHAPE 6 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-A08	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		**TW**
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		**80**
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION * NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES		
WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER	
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED eldoLED

EUREKA

HEXAGONS

Define a meeting or gathering space, or subdivide a very large room with the buoyant, light feeling of Berri. Available in 3 large-scale hexagonal formats - 60” wide to an awe-inspiring 120” wide!

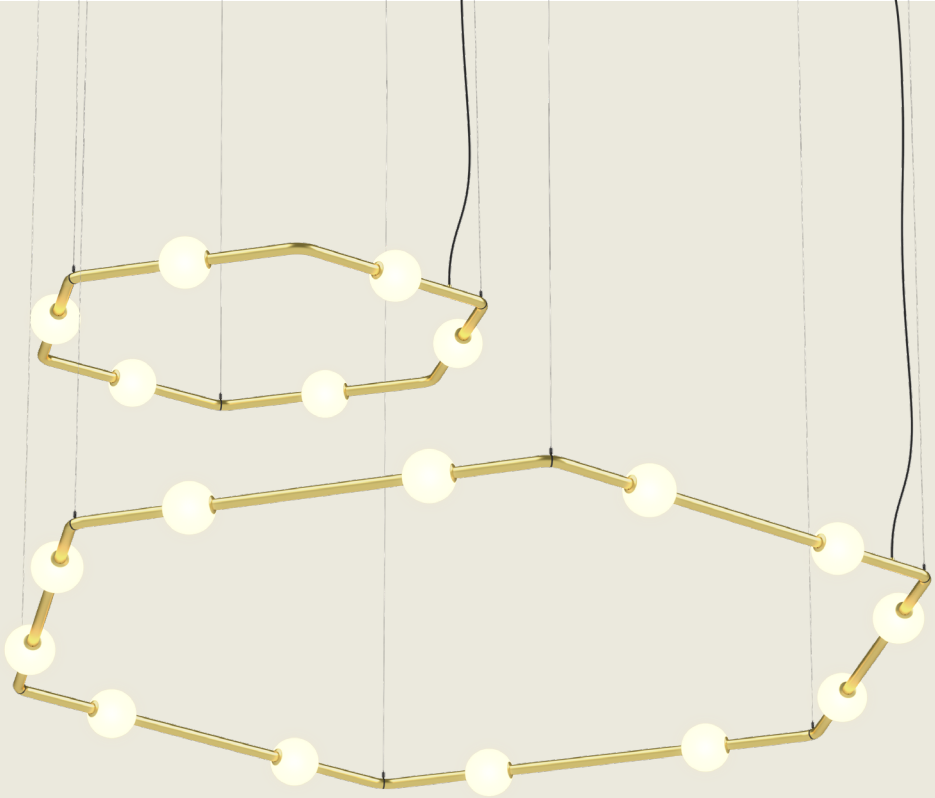

H06

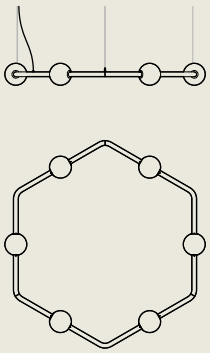

H12-96

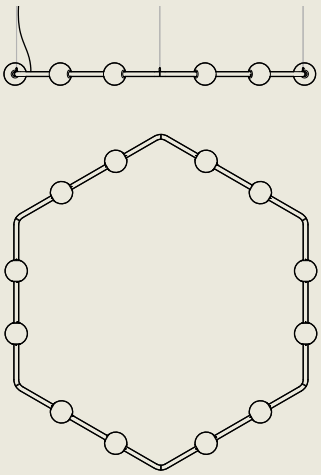

H12-120

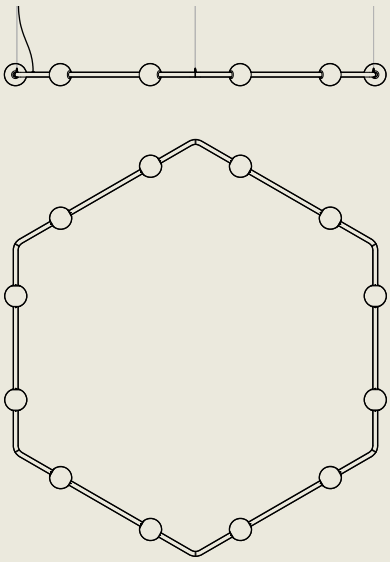

EUREKA

H06, H12-96, L03 - WHE

EUREKA

BERRI 74600 HEXAGONAL

PROJECT PROJET

SPEC TYPE

NOTES

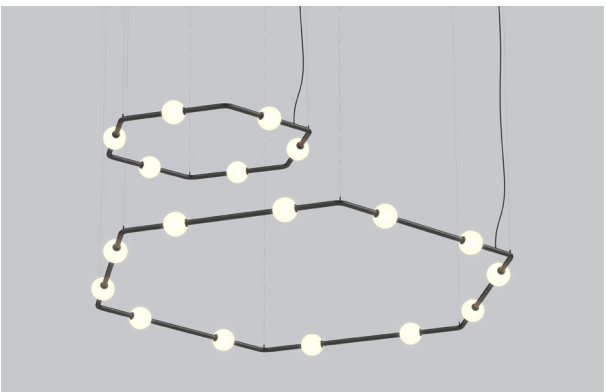

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE



ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

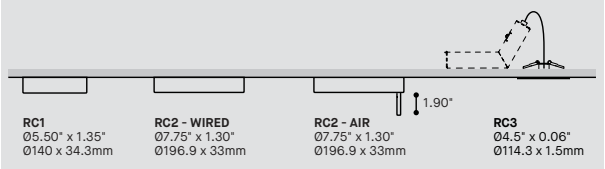

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

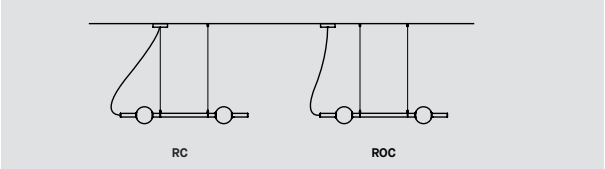

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE

74600-H06	BERRI HEXAGONAL 6 HEADS
74600-H12-96	BERRI HEXAGONAL 12 HEADS 96"
74600-H12-120	BERRI HEXAGONAL 12 HEADS 120"

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE GRADATION

DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION
* REQUIRES RC1 CANOPY

CABLE CÂBLE — **AC**

AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING OPTION OPTION DE MONTAGE

	ROUND CANOPY / PAVILLON ROND
RC1	SCREWLESS 1.35" CANOPY (2473F)
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)

* ONLY AVAILABLE WITH ROC CANOPY POSITION
* NON IC RATED FOR HO

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RC	CANOPY WITH AIRCRAFT CABLE
ROC	CANOPY OFFSET TO AIRCRAFT CABLE

CANOPY FINISH FINI PAVILLON

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE

POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES

WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER

TUBE FINISH FINI TUBE

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
SGO	SOFT GOLD
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR — **WH**

WH	WHITE

ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

EUREKA

BERRI 74600 HEXAGONAL TUNABLE WHITE

PROJECT PROJET

SPEC TYPE

NOTES

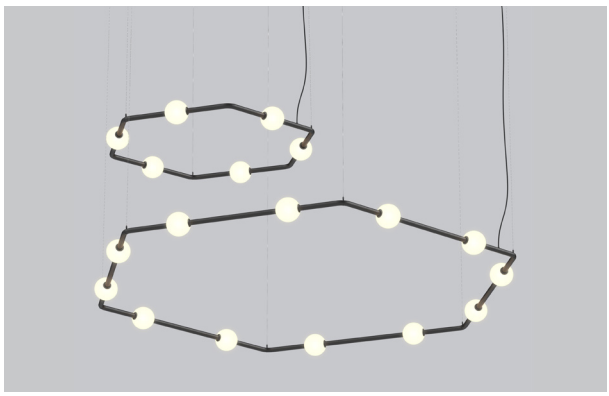

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE

ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

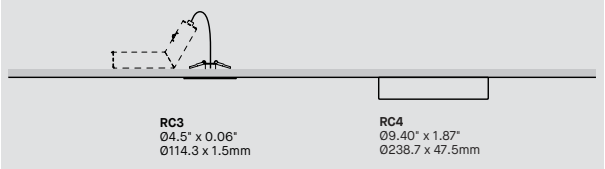

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

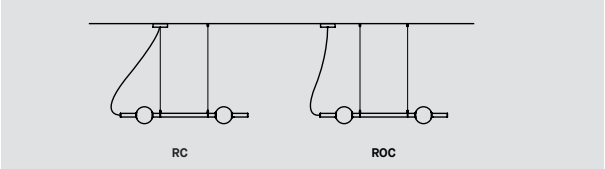

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

		CODE
MODEL MODÈLE		
74600-H06	BERRI 3D SQUARE 6 HEADS	
74600-H12-96	BERRI HEXAGONAL 12 HEADS 96"	
74600-H12-120	BERRI HEXAGONAL 12 HEADS 120"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-H12-96, 74600-H12-120	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		**TW**
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		**80**
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	*REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES		
WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER	
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED eldoLED

EUREKA

S04, S05, Z05, Z06 - BLKE

EUREKA

LINEAR LATITUDE

Play with horizontal Berri configurations. Seven designs with adjustable angles and multiple finishes enable designers to create a signature cluster or to give rhythm to a corridor.

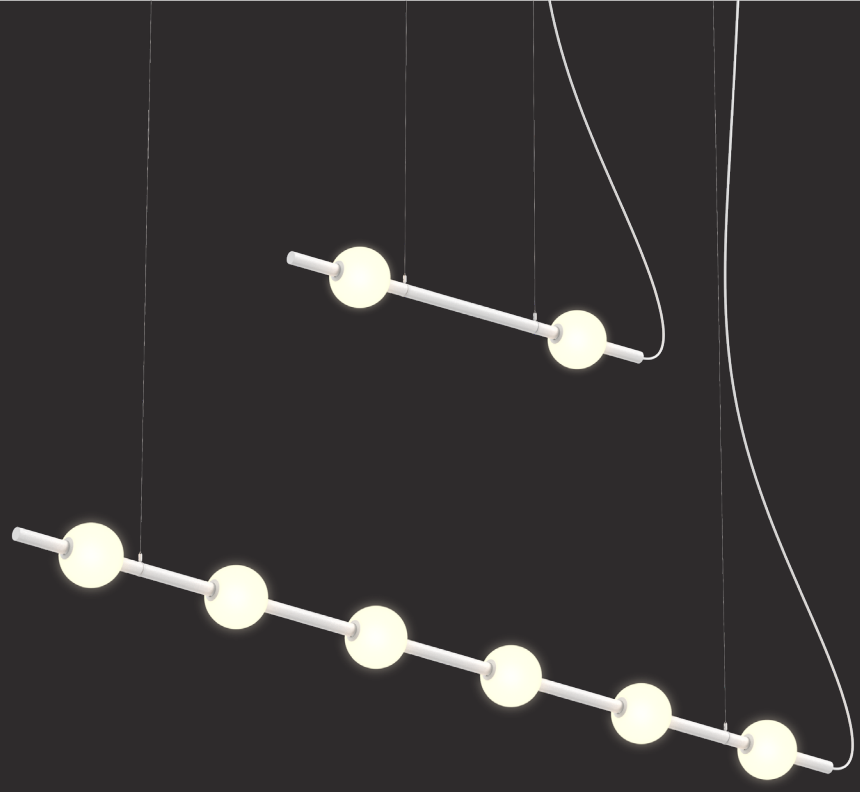

L02-36

L02-48

L03

L04

L05

L06

L08

EUREKA

L02-36, L02-48, L03 - BLKE

EUREKA

BERRI 74600 HORIZONTAL

PROJECT PROJET

SPEC TYPE

NOTES

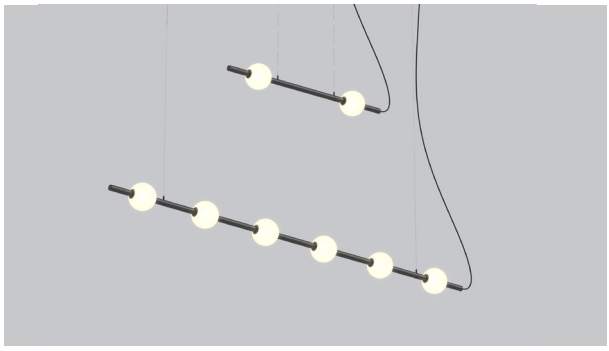

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE



ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

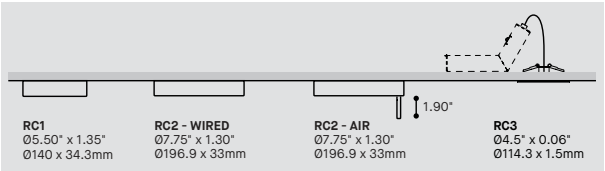

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

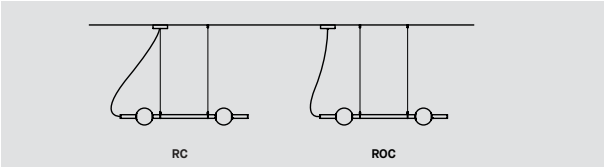

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

		CODE
MODEL MODÈLE		
74600-L02-36	BERRI HORIZONTAL 2 HEADS 36"	
74600-L02-48	BERRI HORIZONTAL 2 HEADS 48"	
74600-L03	BERRI HORIZONTAL 3 HEADS	
74600-L04	BERRI HORIZONTAL 4 HEADS	
74600-L05	BERRI HORIZONTAL 5 HEADS	
74600-L06	BERRI HORIZONTAL 6 HEADS	
74600-L08	BERRI HORIZONTAL 8 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120V-227V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	* REQUIRES RC2 CANOPY * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
EMERGENCY BATTERY BATTERIE D'URGENCE		
FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION * REQUIRES RC1 CANOPY	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC1	SCREWLESS 1.35" CANOPY (2473F)	
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION * NON IC RATED FOR HO	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES		
WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER	
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	
ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

EUREKA

BERRI 74600 HORIZONTAL TUNABLE WHITE

PROJECT PROJET

SPEC TYPE

NOTES

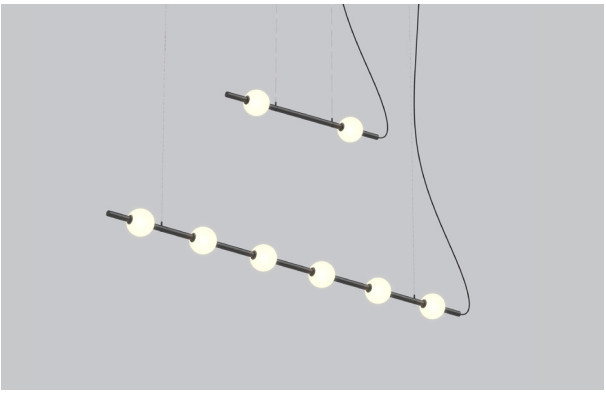

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE

ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

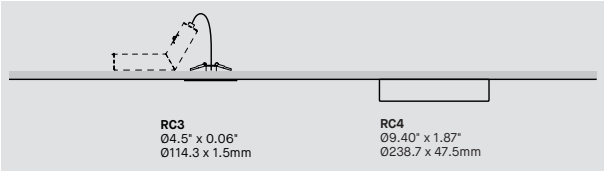

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

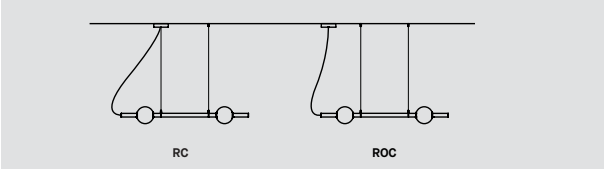

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

		CODE
MODEL MODÈLE		
74600-L02-36	BERRI HORIZONTAL 2 HEADS 36"	
74600-L02-48	BERRI HORIZONTAL 2 HEADS 48"	
74600-L03	BERRI HORIZONTAL 3 HEADS	
74600-L04	BERRI HORIZONTAL 4 HEADS	
74600-L05	BERRI HORIZONTAL 5 HEADS	
74600-L06	BERRI HORIZONTAL 6 HEADS	
74600-L08	BERRI HORIZONTAL 8 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		**TW**
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT * NOT AVAILABLE WITH 74600-L08	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		**80**
TW*	TUNABLE WHITE (2700K TO 5000K) * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL * REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
******	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I) * ONLY AVAILABLE WITH ROC CANOPY POSITION * NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES		
WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER	
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED eldoLED

EUREKA

RECEPTION
EUREKA

MIX AND MATCH

Berri provides designers with a wide array of possibilities. Diverse luminaires can be combined for effect while maintaining a uniform design aesthetic.

V02-36, V02-48, L05 - SGO

RIGHT ANGLES

Right size, right feel. Berri is available in square and rectangular configurations that accommodate 4 to 12 luminous heads each, adding interest, dimension, and delineating the space.

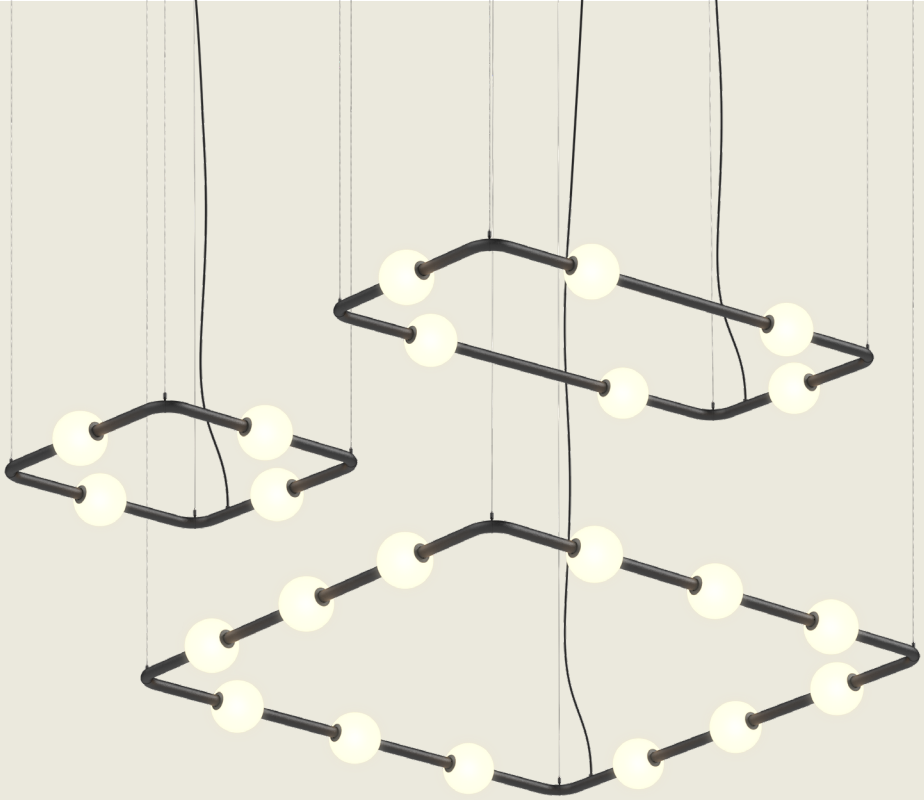

R04



R06



R10



R08



R12

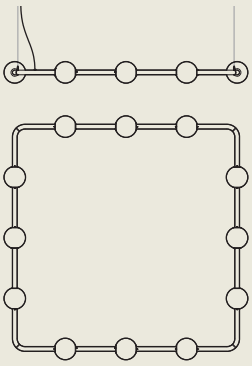

EUREKA

74600-R04 - WHE

EUREKA

BERRI 74600 SQUARE & RECTANGLE

PROJECT PROJET

SPEC TYPE

NOTES

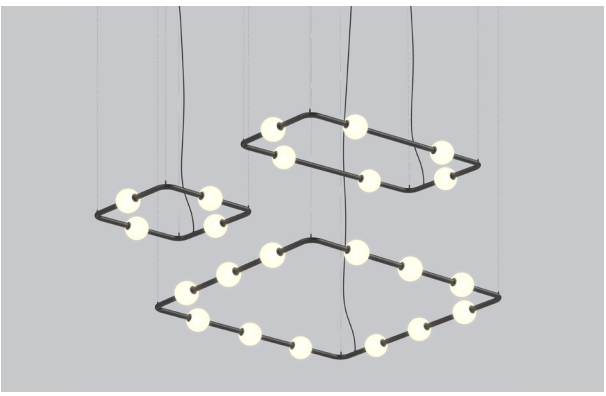

FINISH FINI



BLKE



WHE



SGO

FAMILY FAMILLE



ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

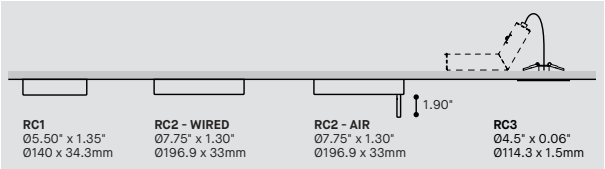

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

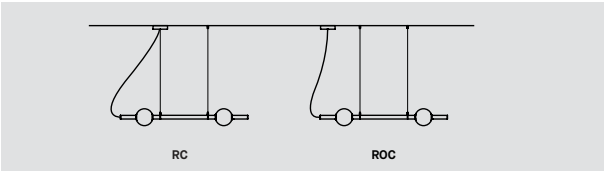

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE

74600-R04	BERRI SQUARE 4 HEADS
74600-R06	BERRI RECTANGULAR 6 HEADS
74600-R08	BERRI SQUARE 8 HEADS
74600-R10	BERRI RECTANGLE 10 HEADS
74600-R12	BERRI SQUARE 12 HEADS

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE GRADATION

DV	0-10V DIMMING (120V-227V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION
* REQUIRES RC1 CANOPY

CABLE CÂBLE — **AC**

AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING OPTION OPTION DE MONTAGE

	ROUND CANOPY / PAVILLON ROND
RC1	SCREWLESS 1.35" CANOPY (2473F)
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)

* ONLY AVAILABLE WITH ROC CANOPY POSITION
* NON IC RATED FOR HO

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RC	CANOPY WITH AIRCRAFT CABLE
ROC	CANOPY OFFSET TO AIRCRAFT CABLE

CANOPY FINISH FINI PAVILLON

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE

POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES

WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER

TUBE FINISH FINI TUBE

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
SGO	SOFT GOLD
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR — **WH**

WH	WHITE

ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

EUREKA

BERRI 74600 SQUARE & RECTANGLE TUNABLE WHITE

PROJECT PROJET

SPEC TYPE

NOTES

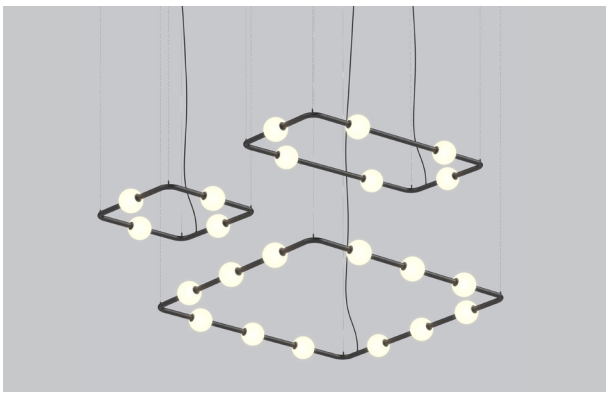

FINISH FINI



BLKE



WHE



SGO

FAMILY FAMILLE

ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

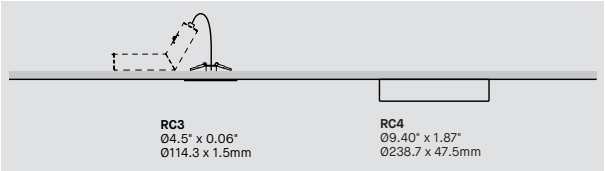

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

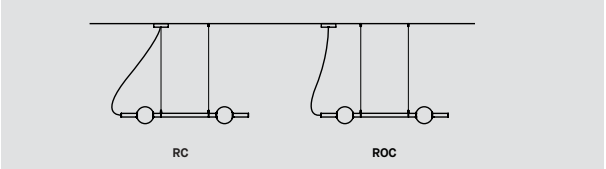

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

		CODE
MODEL MODÈLE		
74600-R04	BERRI SQUARE 4 HEADS	
74600-R06	BERRI RECTANGULAR 6 HEADS	
74600-R08	BERRI SQUARE 8 HEADS	
74600-R10	BERRI RECTANGLE 10 HEADS	
74600-R12	BERRI SQUARE 12 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT * NOT AVAILABLE WITH 74600-R08, 74600-R10, 74600-R12	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		**TW**
TW*	TUNABLE WHITE (2700K TO 5000K) * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		**80**
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL * REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I) * ONLY AVAILABLE WITH ROC CANOPY POSITION * NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES		
WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER	
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED eldoLED

EUREKA

STRAIGHT UP

Berri comes in 7 vertical configurations, from 3 ft to over 9 ft high. They add visual interest to high-ceilinged spaces or can be arranged into a modern chandelier as a staircase centerpiece.

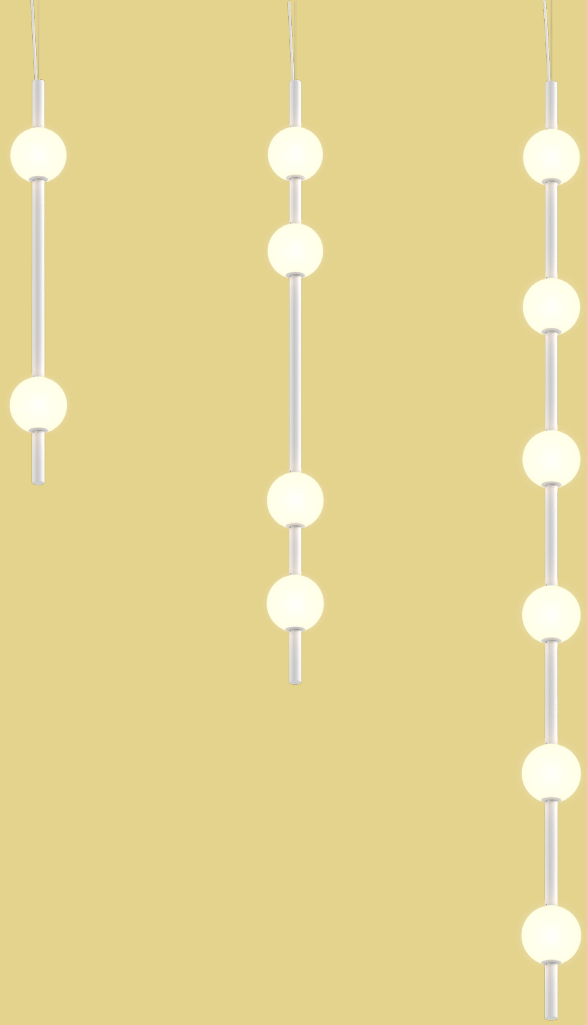

V02-36

V02-48

V03

V04

V05

V06

V08

EUREKA

V03, V04, V05, V06, V08 - SGO

EUREKA

BERRI 74600 VERTICAL

PROJECT PROJET

SPEC TYPE

NOTES

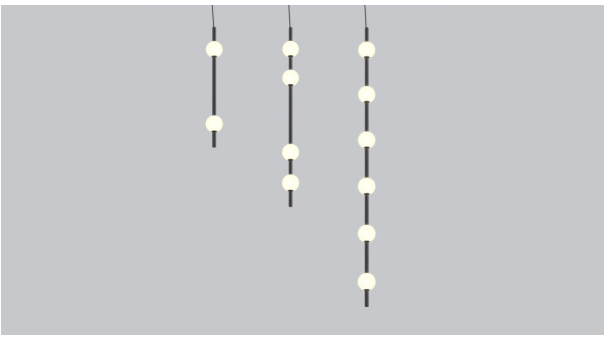

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE



ANGULAR



3D

HEXAGONAL



HORIZONTAL

VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

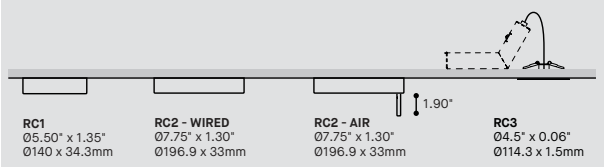

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

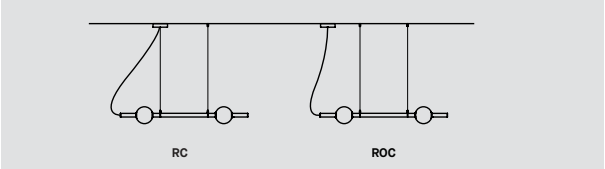

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE

74600-V02-36	BERRI VERTICAL 2 HEADS 36"
74600-V02-48	BERRI VERTICAL 2 HEADS 48"
74600-V03	BERRI VERTICAL 3 HEADS
74600-V04	BERRI VERTICAL 4 HEADS
74600-V05	BERRI VERTICAL 5 HEADS
74600-V06	BERRI VERTICAL 6 HEADS
74600-V08	BERRI VERTICAL 8 HEADS

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE GRADATION

DV	0-10V DIMMING (120V-227V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION
* REQUIRES RC1 CANOPY

CABLE CÂBLE — AC

AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING OPTION OPTION DE MONTAGE

	ROUND CANOPY / PAVILLON ROND
RC1	SCREWLESS 1.35" CANOPY (2473F)
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)

* ONLY AVAILABLE WITH ROC CANOPY POSITION
* NON IC RATED FOR HO

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RC	CANOPY WITH AIRCRAFT CABLE
ROC	CANOPY OFFSET TO AIRCRAFT CABLE

CANOPY FINISH FINI PAVILLON

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

WH	WHITE POWER CORD
BLK	BLACK POWER CORD

TUBE FINISH FINI TUBE

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
SGO	SOFT GOLD
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR — WH

WH	WHITE

ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

EUREKA

BERRI 74600 VERTICAL TUNABLE WHITE

PROJECT PROJET

SPEC TYPE

NOTES

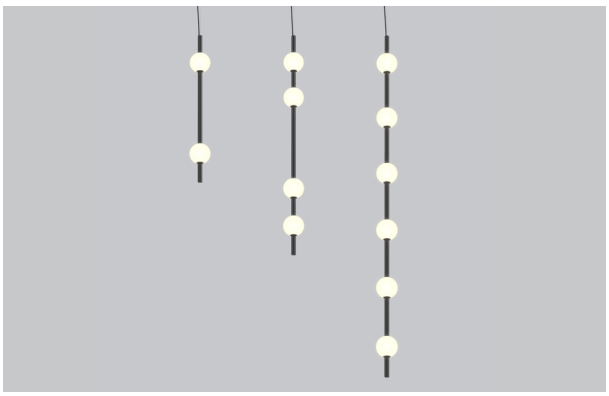

FINISH FINI

BLKE

WHE



SGO

FAMILY FAMILLE

ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

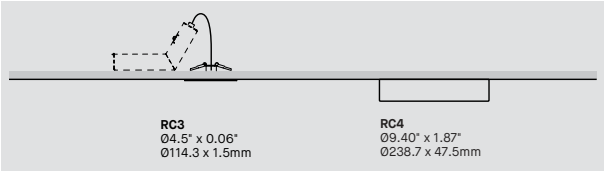

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

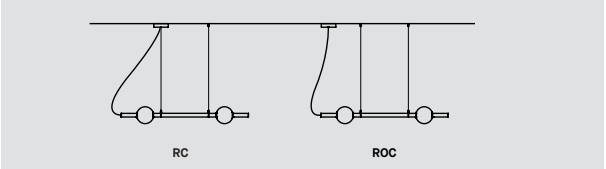

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

		CODE
MODEL MODÈLE		
74600-V02-36	BERRI VERTICAL 2 HEADS 36"	
74600-V02-48	BERRI VERTICAL 2 HEADS 48"	
74600-V03	BERRI VERTICAL 3 HEADS	
74600-V04	BERRI VERTICAL 4 HEADS	
74600-V05	BERRI VERTICAL 5 HEADS	
74600-V06	BERRI VERTICAL 6 HEADS	
74600-V08	BERRI VERTICAL 8 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-V08	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		**TW**
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		**80**
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION * NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
BLK	BLACK POWER CORD	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED eldoLED

EUREKA

BERRI 3D

Berri adds real three-dimensional appeal to lofty space. Multiple interlocking elements bring intricacy of design while a single pendant makes a simple, strong statement.

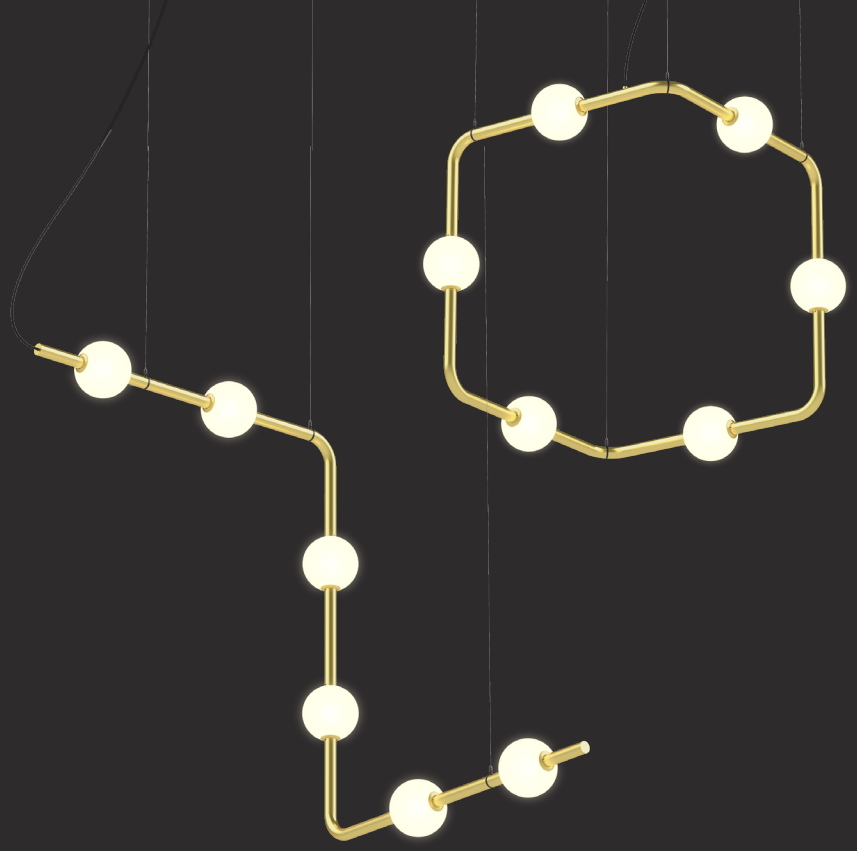

E03

E06

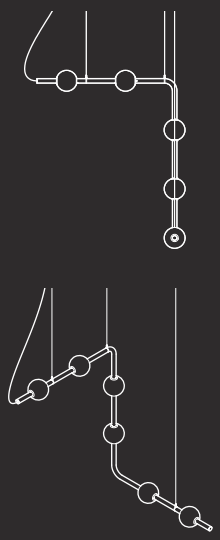

B06

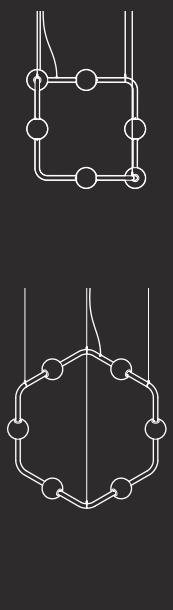

B12

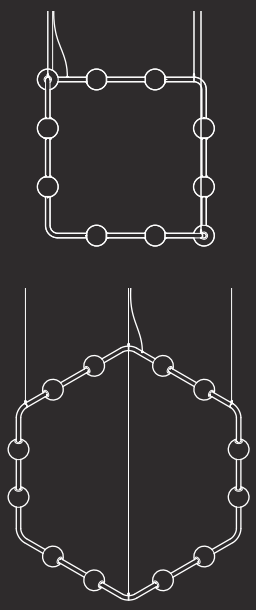

EUREKA

E03, E06, B06,B12 - BLKE

EUREKA

BERRI 74600-3D

PROJECT PROJET

SPEC TYPE

NOTES

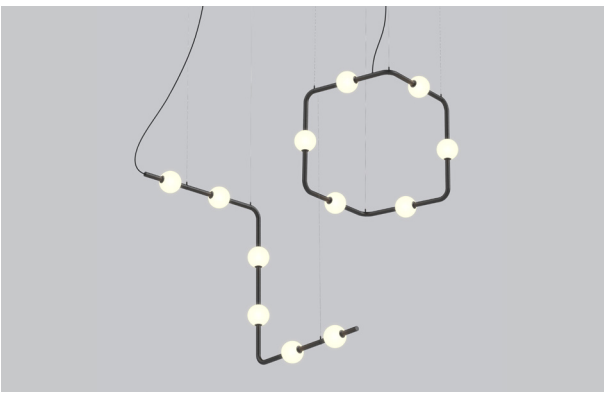

FINISH FINI



BLKE



WHE



SGO

FAMILY FAMILLE



ANGULAR



3D



HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

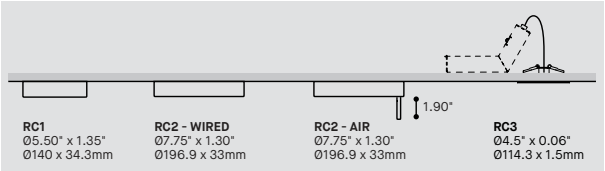

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

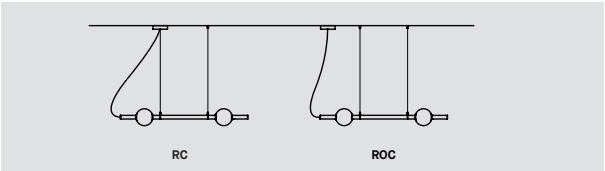

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE

74600-B06	BERRI 3D CUBE 6 HEADS
74600-B12	BERRI 3D CUBE 12 HEADS
74600-E03	BERRI 3D S 3 HEADS
74600-E06	BERRI 3D S 6 HEADS

LIGHT SOURCE SOURCE LUMINEUSE

LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27*	2700K
30	3000K
35	3500K
40	4000K

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
TUNABLE WHITE ALSO AVAILABLE, SEE TUNABLE WHITE SPEC SHEET.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80	80+ CRI
90*	90+ CRI

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE GRADATION

DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL

* REQUIRES RC2 CANOPY
* EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

EMERGENCY BATTERY BATTERIE D'URGENCE

FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.

EMB*	EMERGENCY BATTERY FOR REMOTE BOX

* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION
* REQUIRES RC1 CANOPY

CABLE CÂBLE — **AC**

AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING OPTION OPTION DE MONTAGE

	ROUND CANOPY / PAVILLON ROND
RC1	SCREWLESS 1.35" CANOPY (2473F)
RC2	NLIGHT SCREWLESS 1.30" CANOPY (2474H)
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)

* ONLY AVAILABLE WITH ROC CANOPY POSITION
* NON IC RATED FOR HO

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RC	CANOPY WITH AIRCRAFT CABLE
ROC	CANOPY OFFSET TO AIRCRAFT CABLE

CANOPY FINISH FINI PAVILLON

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE

POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES

WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER

TUBE FINISH FINI TUBE

WHE	WHITE FINE TEXTURE
BLKE	BLACK FINE TEXTURE
SGO	SOFT GOLD
RAL*	PLEASE SPECIFY RAL CODE

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR — **WH**

WH	WHITE

ACCESSORY EMERGENCY BATTERY ACCESSORY EMERGENCY BATTERY

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB IES LED

EUREKA

BERRI 74600-3D TUNABLE WHITE

PROJECT PROJET

SPEC TYPE

NOTES

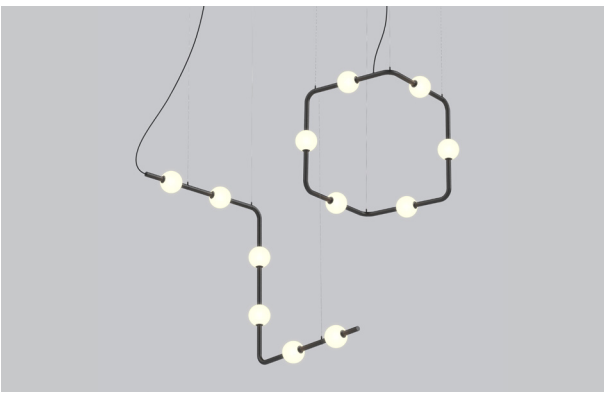

FINISH FINI

BLKE



WHE



SGO

FAMILY FAMILLE

ANGULAR



3D

HEXAGONAL



HORIZONTAL



VERTICAL



SQUARE & RECTANGLE

MOUNTING OPTION OPTION DE MONTAGE

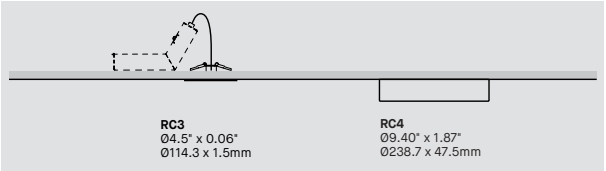

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

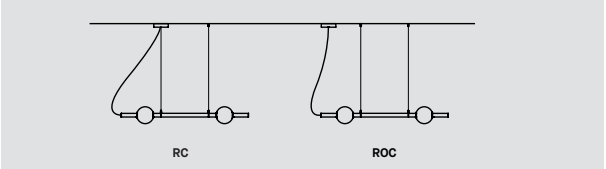

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

		CODE
MODEL MODÈLE		
74600-B06	BERRI 3D SQUARE 6 HEADS	
74600-B12	BERRI 3D SQUARE 12 HEADS	
74600-E03	BERRI 3D S 3 HEADS	
74600-E06	BERRI 3D S 6 HEADS	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE WITH 74600-B12	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		**TW**
TW*	TUNABLE WHITE (2700K TO 5000K)	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		**80**
80	80+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE GRADATION		
DV	DUAL 0-10V DIMMING	
NLT*	NLIGHT NTUNE CONTROL	
	* REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	
CABLE CÂBLE		**AC**
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC3*	OFFSET SLIM PLATE ON REMOTE JBOX (2401A)	
RC4	TUNABLE WHITE SCREWLESS 1.87" CANOPY (2475I)	
	* ONLY AVAILABLE WITH ROC CANOPY POSITION	
	* NOT AVAILABLE WITH NTUNE OPTION	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
RC	CANOPY WITH AIRCRAFT CABLE	
ROC	CANOPY OFFSET TO AIRCRAFT CABLE	
CANOPY FINISH FINI PAVILLON		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
POWER CORD & GRIPPER FINISH FINI CÂBLE D'ALIMENTATION ET ATTACHES		
WH	WHITE POWER CORD & WHITE FINE TEXTURED GRIPPER	
BLK	BLACK POWER CORD & BLACK FINE TEXTURED GRIPPER	
TUBE FINISH FINI TUBE		
WHE	WHITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
SGO	SOFT GOLD	
RAL*	PLEASE SPECIFY RAL CODE	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED eldoLED

EUREKA

TECHNICAL DATA

INSTALLATION WITHOUT CONSTRAINT

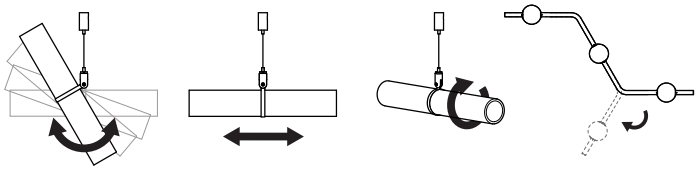

UP TO 60° | FREE PLACEMENT | 360° ADJUSTMENT | ELBOWS CAN BE RECONFIGURED AT WILL

CANOPY OPTIONS



RC1
SCREWLESS 1.35" CANOPY

RC2
NLIGHT SCREWLESS 1.30" CANOPY

RC3
OFFSET SLIM PLATE ON REMOTE JBOX

RC4
TUNABLE WHITE SCREWLESS 1.87" CANOPY



RC
CANOPY WITH AIRCRAFT CABLE



ROC
CANOPY OFFSET TO AIRCRAFT CABLE

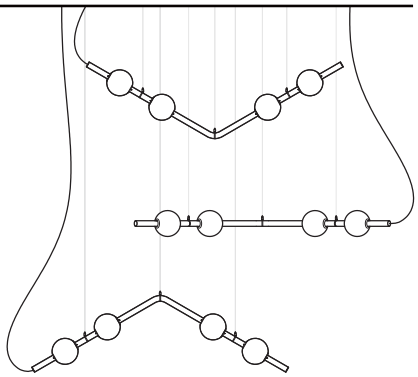

HANGING POSSIBILITIES
Suspension cables can be placed freely along the tube and length can be easily adjusted for multiple hanging possibilities.

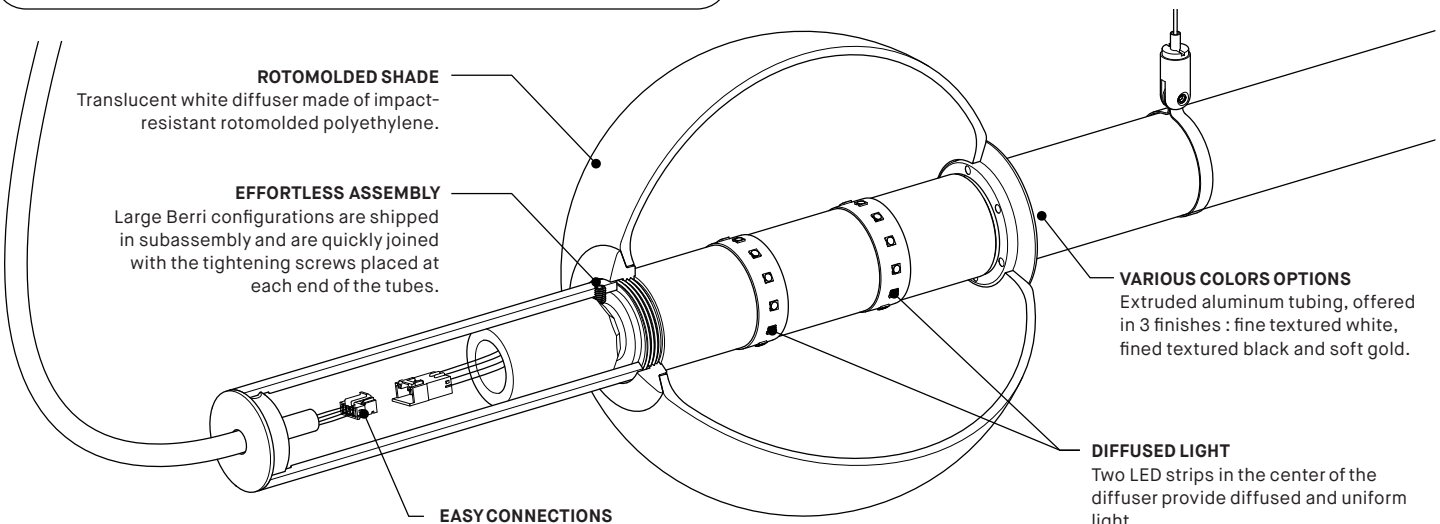

ROTOMOLDED SHADE
Translucent white diffuser made of impact-resistant rotomolded polyethylene.

EFFORTLESS ASSEMBLY
Large Berri configurations are shipped in subassembly and are quickly joined with the tightening screws placed at each end of the tubes.

VARIOUS COLORS OPTIONS
Extruded aluminum tubing, offered in 3 finishes : fine textured white, fined textured black and soft gold.

DIFFUSED LIGHT
Two LED strips in the center of the diffuser provide diffused and uniform light.

EASY CONNECTIONS
Electrically connect Berri modules or subassembly using quick-connect wire connectors.

PRODUCT SPECIFICATION — PER HEAD

PERFORMANCE	REG	HO	TUNABLE WHITE REG	TUNABLE WHITE HO
SYSTEM WATTAGE	4.4W	8.1W	4.4W	8W
DELIVERED LUMENS (4000K)	671 LM	1143 LM	568 LM	952 LM
EFFICACY	153 LM/W	142 LM/W	129 LM/W	119 LM/W
OTHER INFORMATION				
AVG. WEIGHT PER HEAD * Refer to installation sheets for weight per configuration.	1.5LBS / 0.7KG	1.5LBS / 0.7KG	1.5LBS / 0.7KG	1.5LBS / 0.7KG
L70 (LUMEN MAINTENANCE)	60,000	60,000	54,700	54,700
WELL & LEED STANDARD REQUIREMENTS				
MAX. LUMINANCE 450-900 OF NADIR	1 150 CD/M² (AT HO)			
CRI ≥90 LED BOARDS	YES (R9 = 58.8 WITH 4000K)			
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24			

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR	TW FACTOR
80+	5000K	-	0.93
80+	4000K	1.00	1.00
80+	3500K	0.98	0.99
80+	3000K	0.94	0.98
80+	2700K	0.91	0.91
90+	4000K	0.88	-
90+	3500K	0.85	-
90+	3000K	0.81	-
90+	2700K	0.77	-

LIGHT DISTRIBUTION



SINGLE HEAD

Visit our website for warranty terms and conditions.

EUREKA

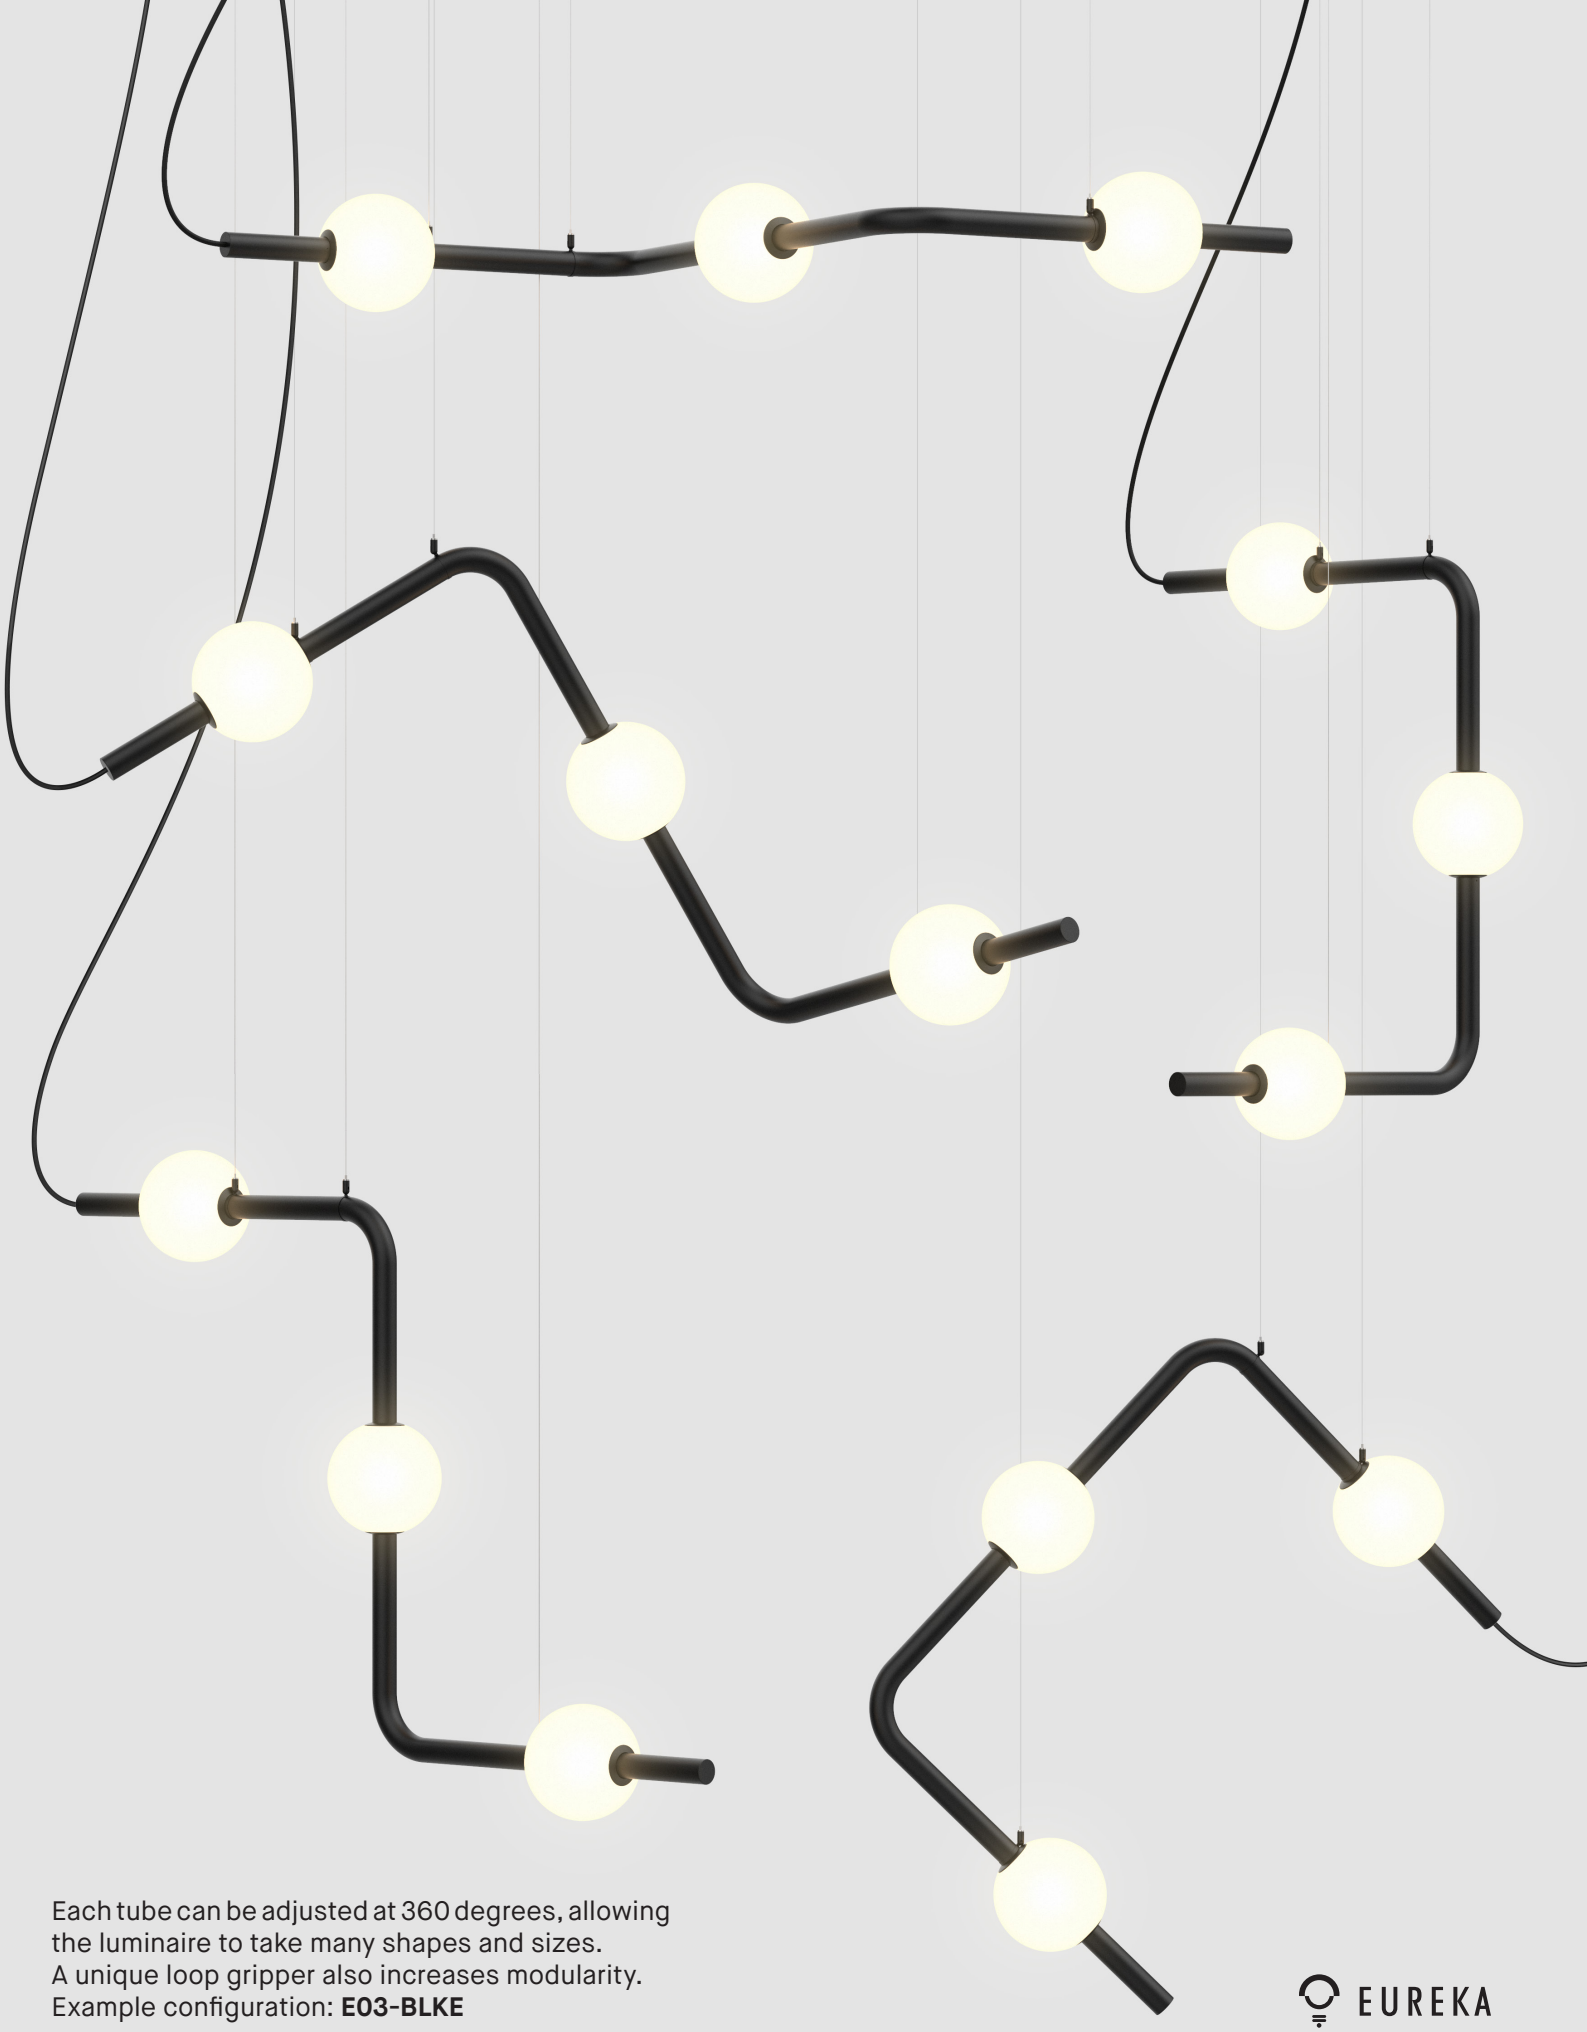

Each tube can be adjusted at 360 degrees, allowing the luminaire to take many shapes and sizes.
A unique loop gripper also increases modularity.
Example configuration: **E03-BLKE**

EUREKA

PHOTOMETRIC REPORT

BERRI 74600

SINGLE HEAD REG

CCT (K):	4000
Delivered Lumens (lm):	682
System wattage (W)*:	4.4
Distribution:	Direct/Indirect
Delivered Efficacy (lm/W):	153
Photometric type	C

Luminous dimensions	
Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.8 (200)
90-270 Axis:	11.8 (300)
Height:	7.8 (200)

Luminaire spacing criteria	
2 luminaires, plane 0:	1.49
2 luminaires, plane 90:	1.36
4 luminaires:	1.61

*System wattage include driver and LED module consumption

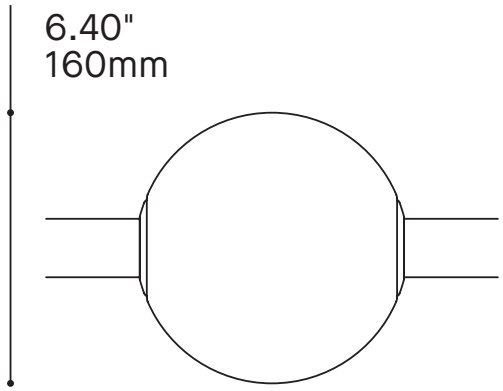

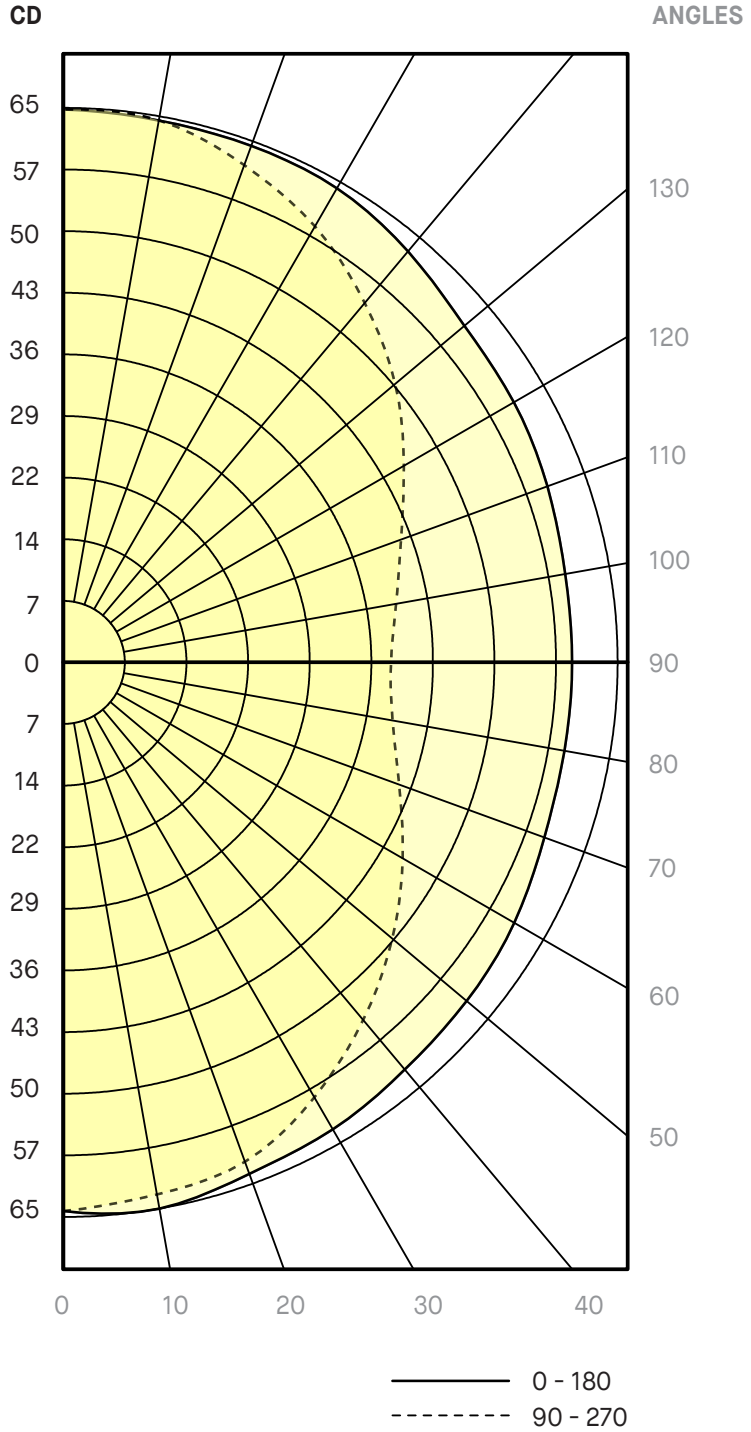

EUREKA

PHOTOMETRIC REPORT

BERRI 74600

SINGLE HEAD HO

CCT (K):	4000
Delivered Lumens (lm):	1160
System wattage (W)*:	8.1
Distribution:	Direct/Indirect
Delivered Efficacy (lm/W):	143.2
Photometric type	C

Luminous dimensions	
Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.8 (200)
90-270 Axis:	11.8 (300)
Height:	7.8 (200)

Luminaire spacing criteria	
2 luminaires, plane 0:	1.47
2 luminaires, plane 90:	1.32
4 luminaires:	1.58

*System wattage include driver and LED module consumption

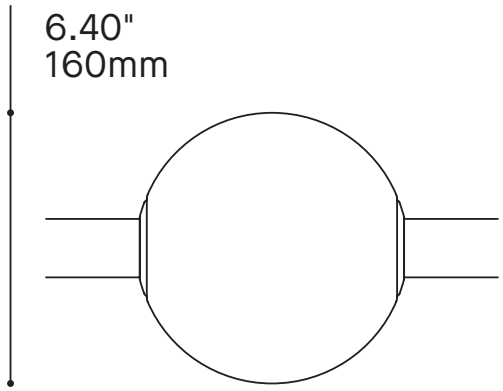

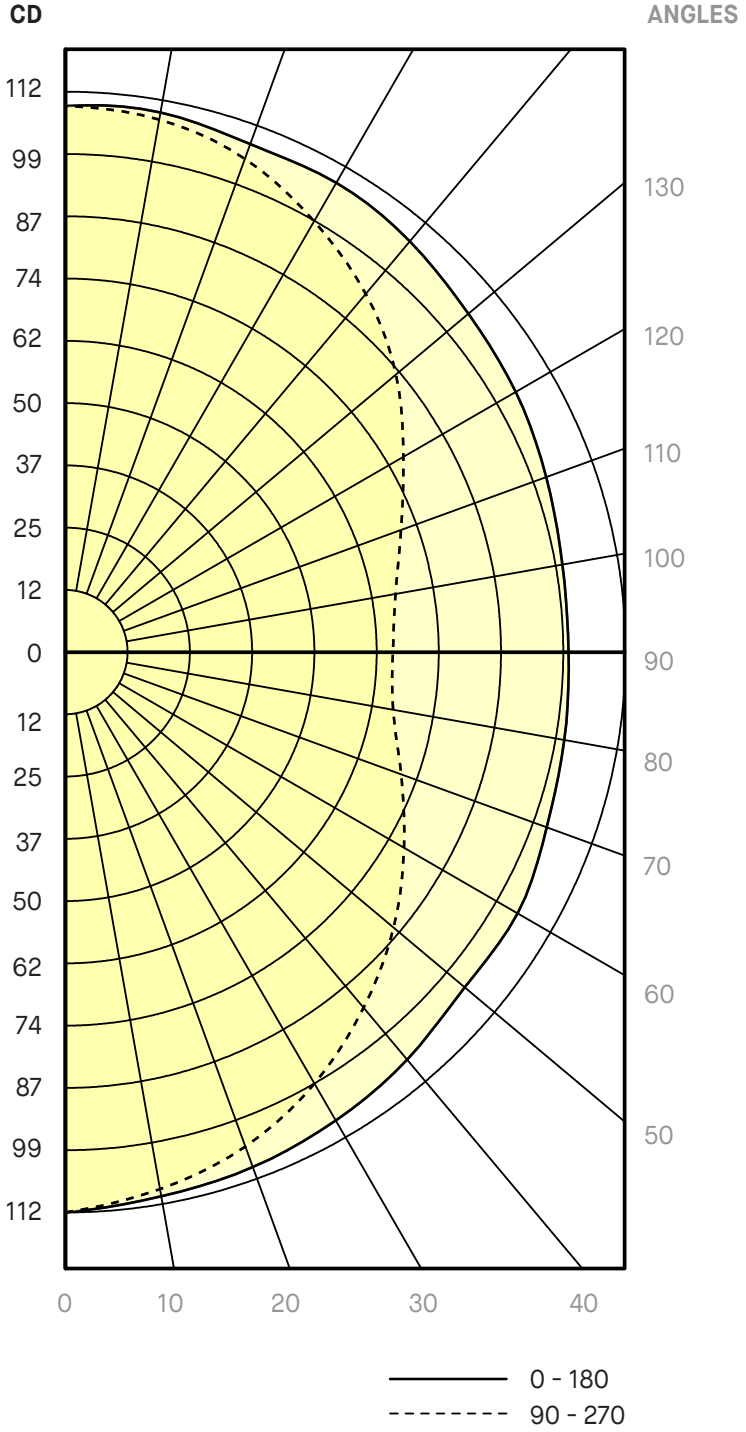

EUREKA

PHOTOMETRIC REPORT

BERRI 74600

SINGLE HEAD TUNABLE WHITE REG

CCT (K):	4000
Delivered Lumens (lm):	577
System wattage (W)*:	4.4
Distribution:	Direct/Indirect
Delivered Efficacy (lm/W):	129
Photometric type	C

Luminous dimensions	
Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.8 (200)
90-270 Axis:	11.8 (300)
Height:	7.8 (200)

Luminaire spacing criteria	
2 luminaires, plane 0:	1.47
2 luminaires, plane 90:	1.34
4 luminaires:	1.60

*System wattage include driver and LED module consumption

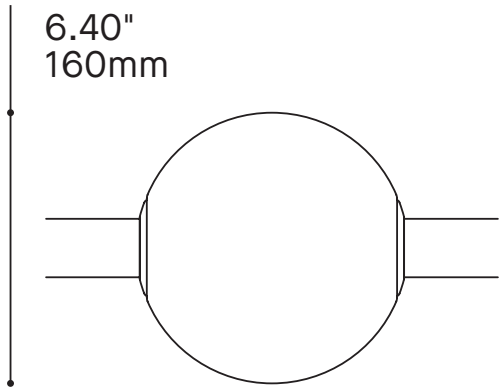

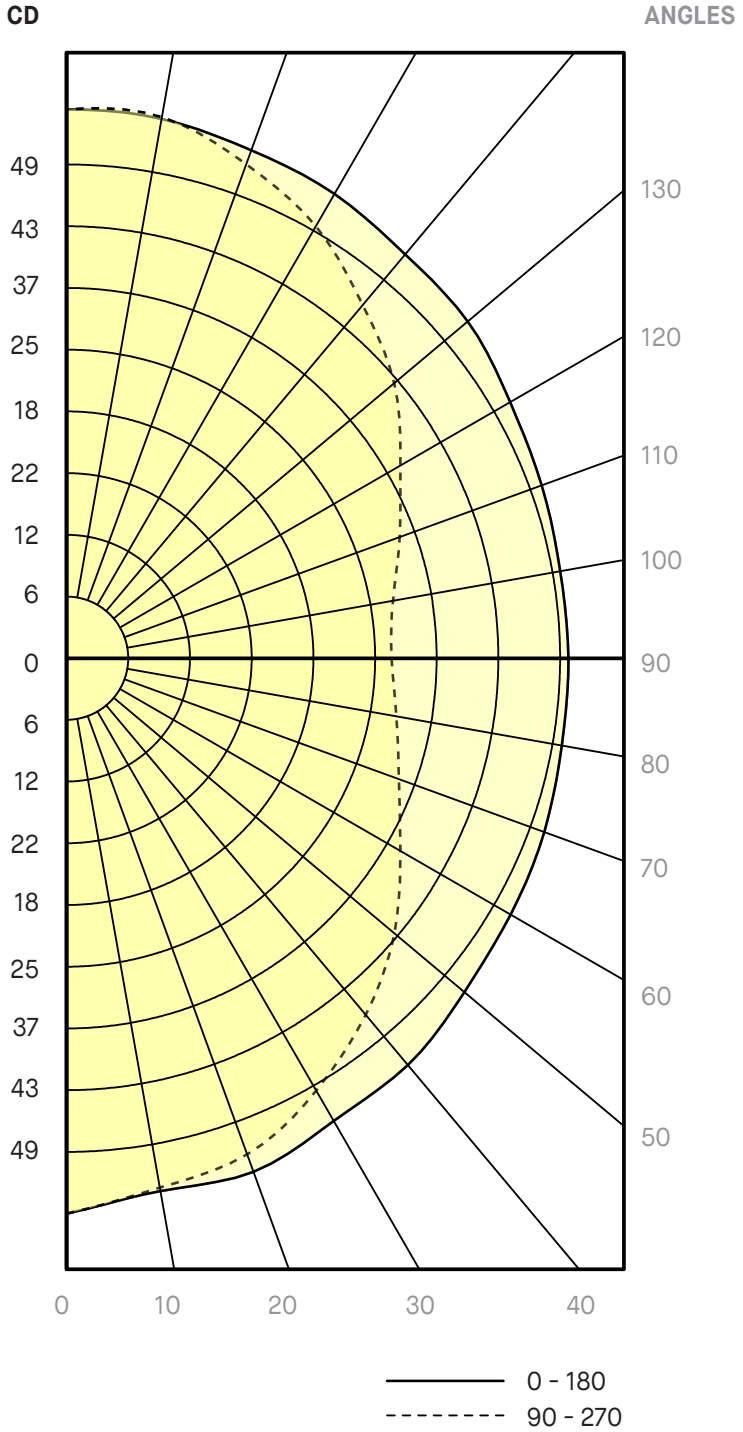

EUREKA

PHOTOMETRIC REPORT

BERRI 74600

SINGLE HEAD TUNABLE WHITE HO

CCT (K):	4000
Delivered Lumens (lm):	966
System wattage (W)*:	8.0
Distribution:	Direct/Indirect
Delivered Efficacy (lm/W):	119
Photometric type	C

Luminous dimensions	
Luminous shape:	Rectangle
Units:	in (mm)
0-180 Axis:	7.8 (200)
90-270 Axis:	11.8 (300)
Height:	7.8 (200)

Luminaire spacing criteria	
2 luminaires, plane 0:	1.49
2 luminaires, plane 90:	1.36
4 luminaires:	1.61

*System wattage include driver and LED module consumption

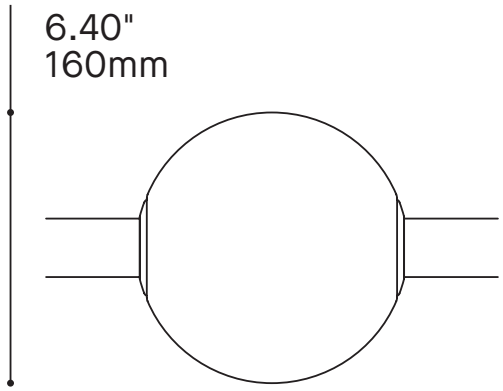

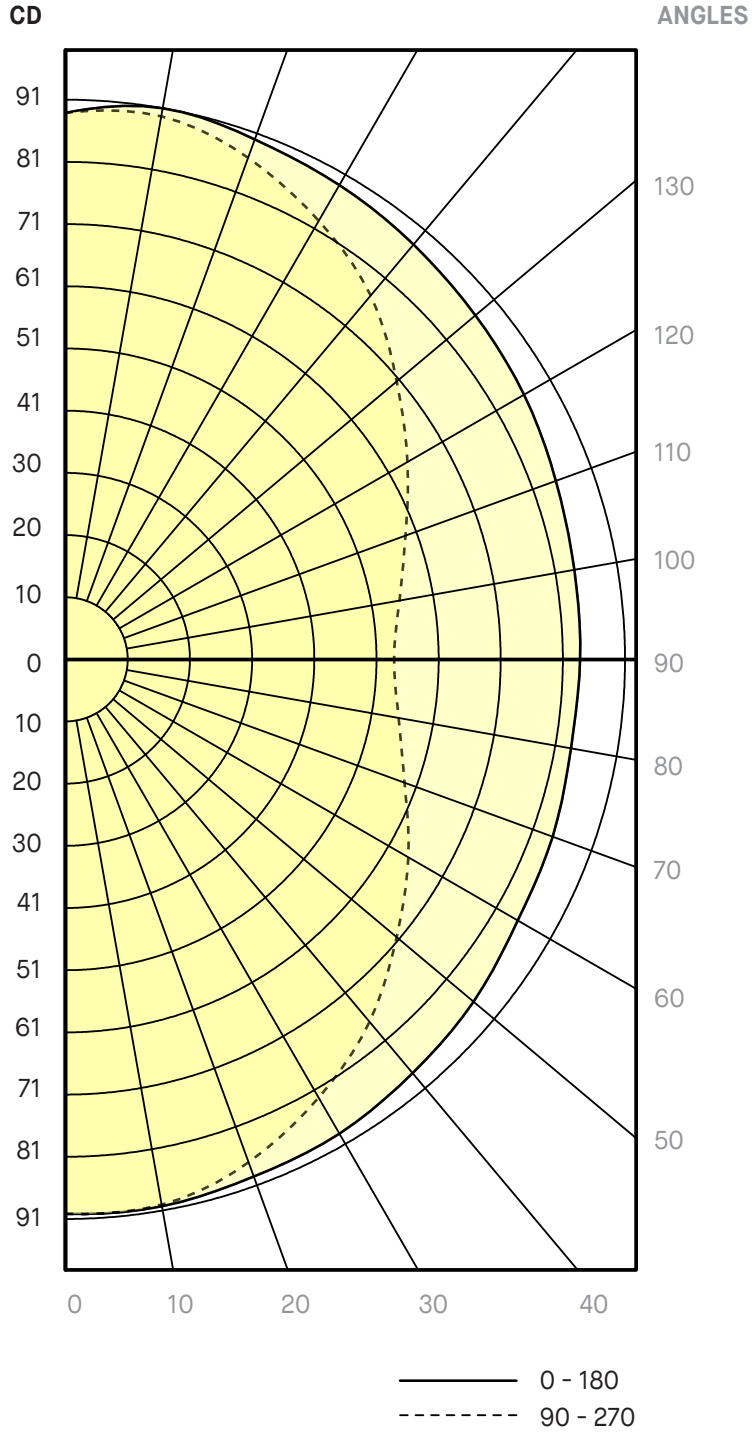

EUREKA

EUREKA